


**VERIFICATION SURVEY
OF
BUILDING T363
SANTA SUSANA FIELD LABORATORY
ROCKWELL INTERNATIONAL
VENTURA COUNTY, CALIFORNIA**

T. J. VITKUS AND J. R. MORTON

Prepared for the
Office of Environmental Restoration
U.S. Department of Energy

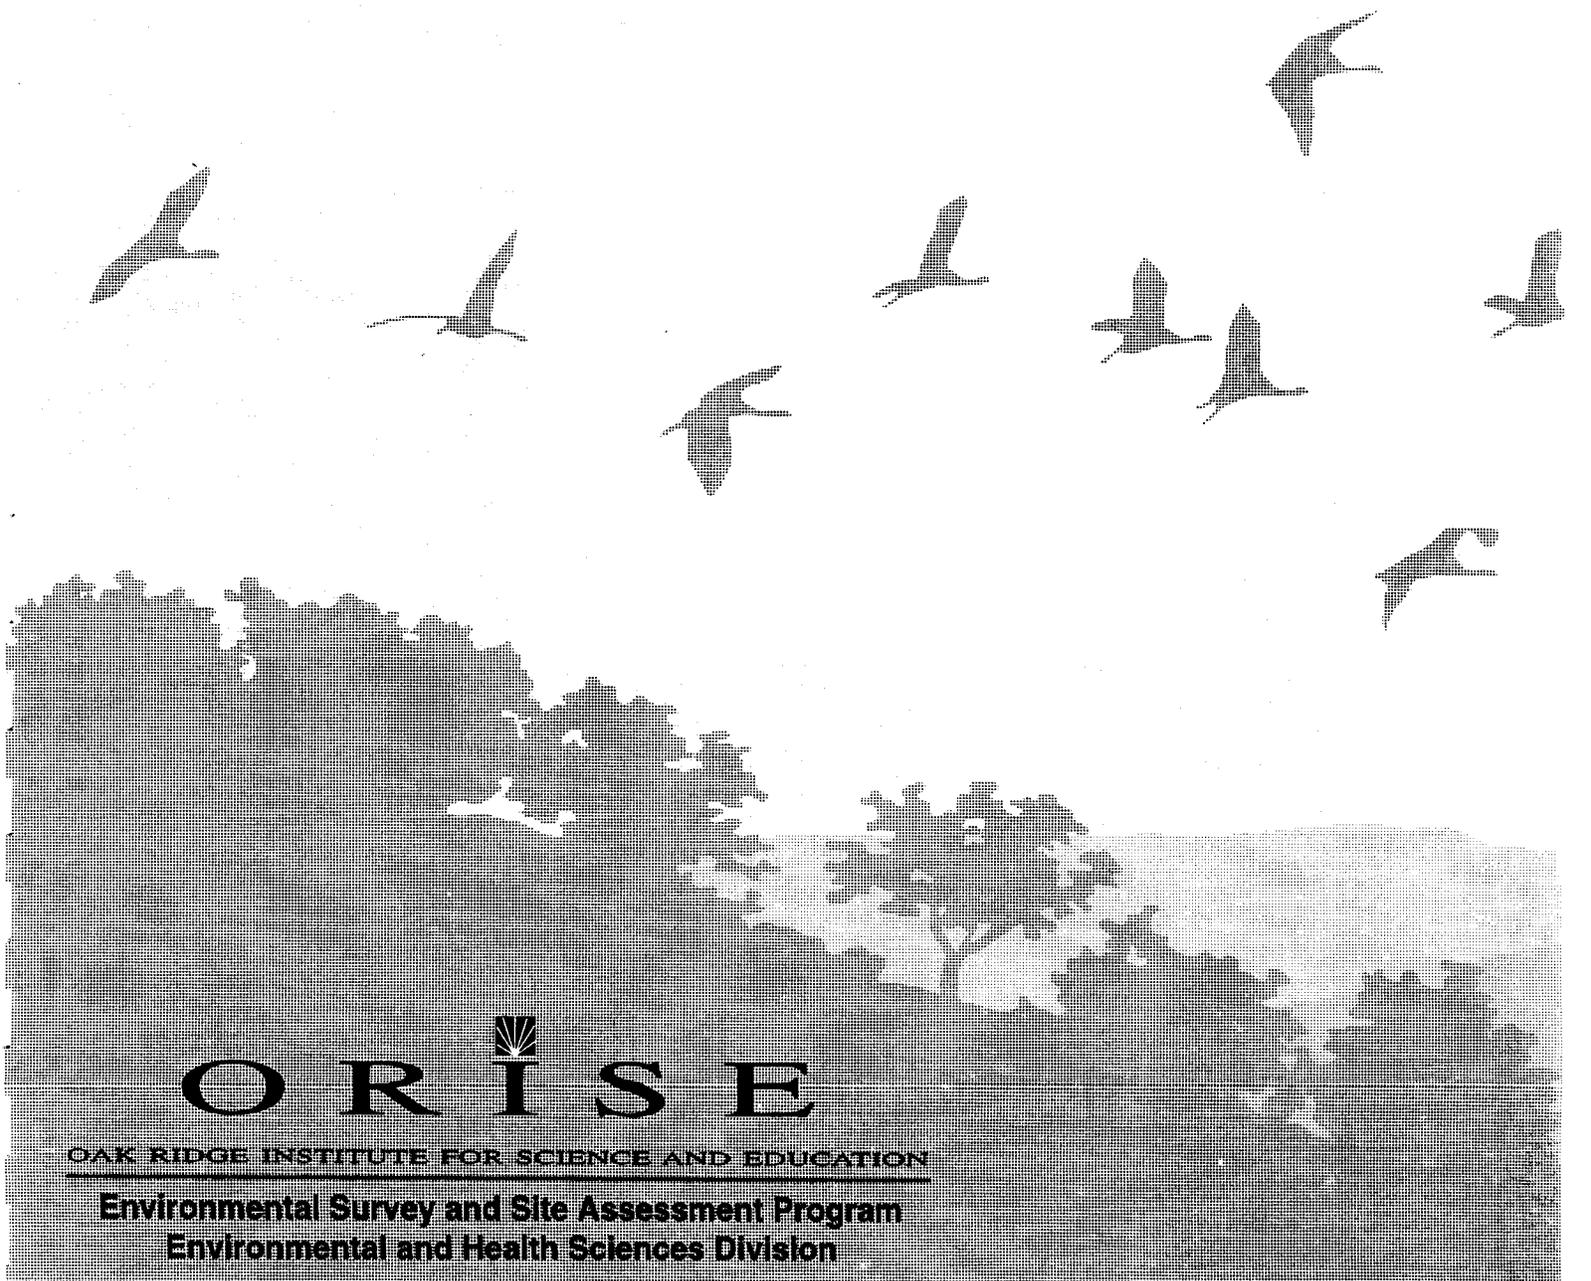

ORISE

OAK RIDGE INSTITUTE FOR SCIENCE AND EDUCATION

**Environmental Survey and Site Assessment Program
Environmental and Health Sciences Division**

The Oak Ridge Institute for Science and Education (ORISE) was established by the U.S. Department of Energy to undertake national and international programs in science and engineering education, training and management systems, energy and environment systems, and medical sciences. ORISE and its programs are operated by Oak Ridge Associated Universities (ORAU) through a management and operating contract with the U.S. Department of Energy. Established in 1946, ORAU is a consortium of 89 colleges and universities.

NOTICES

The opinions expressed herein do not necessarily reflect the opinions of the sponsoring institutions of Oak Ridge Associated Universities.

This report was prepared as an account of work sponsored by the United States Government. Neither the United States Government nor the U.S. Department of Energy, nor any of their employees, makes any warranty, expressed or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe on privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, mark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement or recommendation, or favor by the U.S. Government or any agency thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the U.S. Government or any agency thereof.

**VERIFICATION SURVEY
OF
BUILDING T363
SANTA SUSANA FIELD LABORATORY
ROCKWELL INTERNATIONAL
VENTURA COUNTY, CALIFORNIA**

Prepared by

T. J. Vitkus and J. R. Morton

Environmental Survey and Site Assessment Program
Environmental and Health Sciences Division
Oak Ridge Institute for Science and Education
Oak Ridge, Tennessee 37831-0117

Prepared for the

Office of Environmental Restoration
U.S. Department of Energy


FINAL REPORT

OCTOBER 1996


This report is based on work performed under contract number DE-AC05-76OR00033 with the U.S. Department of Energy.


VERIFICATION SURVEY
OF
BUILDING T363
SANTA SUSANA FIELD LABORATORY
ROCKWELL INTERNATIONAL
VENTURA COUNTY, CALIFORNIA

Prepared by:  Date: 10/21/96
J. R. Morton, Health Physics Technician
Environmental Survey and Site Assessment Program

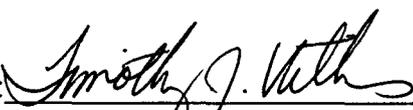Prepared by:  Date: 10/29/96
T. J. Vitkus, Survey Projects Manager
Environmental Survey and Site Assessment Program

Reviewed by:  Date: 11/3/96
R. D. Condra, Technical Resources Manager
Environmental Survey and Site Assessment Program

Reviewed by:  Date: 11/6/96
A. T. Payne, Administrative Services Manager,
Quality Assurance/Health & Safety Manager
Environmental Survey and Site Assessment Program

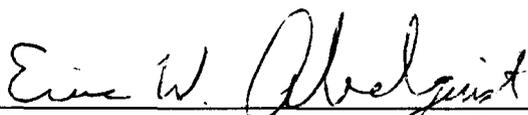Reviewed by:  Date: 10/31/96
E. W. Abelquist, Assistant Program Director
Environmental Survey and Site Assessment Program

Reviewed by:  Date: 11/6/96
W. L. Beck, Program Director
Environmental Survey and Site Assessment Program

ACKNOWLEDGMENTS

The authors would like to acknowledge the significant contributions of the following staff members:

FIELD STAFF

T. L. Bright

LABORATORY STAFF

R. D. Condra
J. S. Cox
M. J. Laudeman

CLERICAL STAFF

D. K. Ash
T. S. Fox
K. E. Waters

ILLUSTRATOR

T. D. Herrera

TABLE OF CONTENTS

	PAGE
List of Figures	ii
List of Tables	iii
Abbreviations and Acronyms	iv
Introduction	1
Site Description	2
Objectives	3
Document Review	3
Procedures	3
Findings and Results	6
Comparison of Results with Guidelines	8
Summary	9
References	25
Appendices:	
Appendix A: Major Instrumentation	
Appendix B: Survey and Analytical Procedures	
Appendix C: Residual Radioactive Material Guidelines Summarized from DOE Order 5400.5	

LIST OF FIGURES

	<u>PAGE</u>
FIGURE 1: Los Angeles, California Area—Location of the Santa Susana Field Laboratory Site	10
FIGURE 2: Santa Susana Field Laboratory Area IV, Plot Plan—Location of Building T363	11
FIGURE 3: Building T363—Plot Plan	12
FIGURE 4: Building T363, Bay 1—Measurement and Sampling Locations	13
FIGURE 5: Building T363, Bay 2—Measurement and Sampling Locations	14
FIGURE 6: Building T363, Bay 3—Measurement and Sampling Locations	15
FIGURE 7: Building T363, Bay 4—Measurement and Sampling Locations	16
FIGURE 8: Building T363, Room 100—Measurement and Sampling Locations	17
FIGURE 9: Building T363, Room 101—Measurement and Sampling Locations	18
FIGURE 10: Building T363, Room 102—Measurement and Sampling Locations	19
FIGURE 11: Building T363, Room 103—Measurement and Sampling Locations	20
FIGURE 12: Building T363, Exterior—Measurement and Sampling Locations	21

LIST OF TABLES

	PAGE
TABLE 1: Summary of Surface Activity Levels	22
TABLE 2: Exposure Rates	24

ABBREVIATIONS AND ACRONYMS

$\mu\text{R/h}$	microroentgens per hour
AEC	Atomic Energy Commission
BKG	background
cm	centimeter
cm^2	square centimeter
cpm	counts per minute
D&D	Decontamination and Decommissioning
DOE	Department of Energy
dpm/100 cm^2	disintegrations per minute per 100 square centimeters
EM	Environmental Restoration and Waste Management
EML	Environmental Measurements Laboratory
EPA	Environmental Protection Agency
ERDA	Energy Research and Development Administration
ESSAP	Environmental Survey and Site Assessment Program
ETEC	Energy Technology Engineering Center
ha	hectare
m	meter
m^2	square meter
M&O	Management and Operation
MDC	minimum detectable concentration
NaI	sodium iodide
NIST	National Institute of Standards and Technology
NRC	Nuclear Regulatory Commission
ORISE	Oak Ridge Institute for Science and Education
PIC	pressurized ionization chamber
SRE	Sodium Reactor Experiment
SSFL	Santa Susana Field Laboratory

**VERIFICATION SURVEY
OF
BUILDING T363
SANTA SUSANA FIELD LABORATORY
ROCKWELL INTERNATIONAL
VENTURA COUNTY, CALIFORNIA**

INTRODUCTION

Rockwell International's Rocketdyne Division operates the Santa Susana Field Laboratory (SSFL). The Energy Technology Engineering Center (ETEC) is that portion of the SSFL, operated for the Department of Energy (DOE), which performs testing of equipment, materials, and components for nuclear and energy related programs. Contract work for the Atomic Energy Commission (AEC) and the Energy Research and Development Administration (ERDA), predecessor agencies to the DOE, began in the early 1950's. Specific programs conducted for AEC/ERDA/DOE involved the engineering, development, testing, and manufacturing operations of nuclear reactor systems and components. Other SSFL activities have also been conducted for the National Aeronautics and Space Administration, the Department of Defense, and other government related or affiliated organizations and agencies. Some activities have been licensed by both the Nuclear Regulatory Commission (NRC) and by the State of California Radiological Health Branch of the Department of Health Services.

Numerous buildings and land areas became radiologically contaminated as a result of the various operations which included ten reactors, seven criticality test facilities, fuel fabrication, reactor and fuel disassembly, laboratory work, and on-site storage of nuclear material. Potential radioactive contaminants identified at the site are uranium (in natural and enriched isotopic abundances), plutonium, Am-241, fission products (primarily Cs-137, and Sr-90 present as a mixed fission product that has not been separated), activation products (tritium [H-3], Co-60, Eu-152, Eu-154, Ni-63, Pm-147, and Ta-182). Chemical contaminants, mainly chlorinated organic solvents, have also been identified in groundwater, primarily as a result of rocket engine testing.

Decontamination and decommissioning (D&D) of contaminated facilities began in the late 1960's and continues as the remaining DOE program operations at ETEC have been terminated, effective September 30, 1995. As part of this D&D program, Rockwell performed decommissioning and final

status surveys of a number of facilities that supported the various nuclear-related ETEC operations during the latter part of the 1950's and have continued through to the present. Environmental management of DOE contaminated properties continues under the termination clause of the existing Management and Operation (M&O) contract. Surplus sodium facilities have been included in the current Environmental Restoration and Waste Management (EM) Program for stabilization and eventual clean-up.

Most recently, D&D activities and final status surveys have been completed for Building T363. Historical documents indicate that Building T363 was used for sodium systems to support the Sodium Reactor Experiment (SRE) from prior to 1959 until 1963. Since 1963, the facility has been used primarily for storage. Surveys performed by Rockwell in April 1993 showed fixed contamination on the Bay 4 floors, walls, and horizontal surfaces of pipes and light fixtures. A subsequent decontamination effort was conducted in July 1995, followed by a final status survey (Rockwell 1996).

DOE's Office of Environmental Restoration, Northwestern Area Programs is responsible for oversight of a number of remedial actions that have been or will be conducted at the SSFL. It is the policy of DOE to perform independent (third party) verification of remedial action activities conducted within Office of Environmental Restoration programs. The purpose of these independent verifications is to confirm that remedial actions have been effective in meeting established and supplemental guidelines and that the documentation accurately and adequately describes the radiological conditions at the site. The Environmental Survey and Site Assessment Program (ESSAP) of the Oak Ridge Institute for Science and Education (ORISE) was designated as the organization responsible for this task at SSFL, and was requested to verify the current radiological status of Building T363.

SITE DESCRIPTION

The SSFL is located in the Simi Hills of southeastern Ventura County, California, approximately 47 kilometers (29 miles) northwest of downtown Los Angeles (Figure 1). The site is comprised of approximately 1,090 hectares (ha [2,700 acres]) and is divided into four administrative areas (Areas I through IV) and a Buffer Zone. DOE operations were conducted in Rockwell International-owned

facilities located within the 117 ha Area IV. The ETEC portion of Area IV consists of government-owned buildings occupying 36 ha.

Building T363 is located on L Street in the southern portion of Area IV (Figure 2). The 130 square meter (m²) structure is comprised primarily of four side-by-side work bays. Each bay is separated by concrete walls and possesses inner north and south walls with sheet metal coverings and double-doors. Each bay has approximately 22 m² of concrete floor space and a ceiling height of 3 meters (m). The remainder of the building is constructed similarly and is subdivided into miscellaneous rooms. Figure 3 shows the building's plot plan.

OBJECTIVES

The objectives of the verification survey were to provide independent document reviews and measurement and sampling data for use by the DOE in determining the radiological status of the facility and, in particular, determining whether or not the facility meets the guideline requirements for release without radiological restrictions.

DOCUMENT REVIEW

ESSAP reviewed Rockwell's final radiological status survey report (Rockwell 1996). Procedures and methods used were reviewed for adequacy and appropriateness. Final status survey data were reviewed for accuracy, completeness, and compliance with guidelines. Additional review of procedures and supporting documentation referenced in the survey report was performed at SSFL at the time of the verification survey.

PROCEDURES

During the period of July 29 through 31, 1996, ESSAP performed a verification survey of Building T363 at the Santa Susana Field Laboratory. The survey was in accordance with a site-specific survey plan submitted to and approved by DOE and the ORISE/ESSAP Survey Procedures and Quality

Assurance Manuals (ORISE 1996a; 1995a and b). This report summarizes the procedures and results of the survey.

SURVEY PROCEDURES: INTERIOR

The following procedures were used for interior portions of Building T363.

Reference Grid

Measurement and sampling locations were referenced to the existing 1 m × 1 m reference grid that was established during the final status surveys. Measurement and sampling data from any ungridded surfaces, such as upper walls and ceilings, were referenced to the floor or lower wall grid coordinates or to prominent building features.

Surface Scans

Surface scans for alpha, beta, and gamma activity were performed on 100 percent of floor and lower wall surfaces and five percent of upper surfaces using NaI scintillation, gas proportional, and/or ZnS detectors coupled to ratemeters or ratemeter-scalers with audible indicators. Areas of elevated direct radiation identified by scans were marked for further investigation.

Surface Activity Measurements

Direct measurements for total alpha and total beta activity were performed at 36 randomly selected floor, lower wall, and upper surface locations. In one area, where elevated direct radiation was detected by surface scans, one measurement was made at the location of elevated direct radiation together with five additional measurements at the center and four points equidistant from the center and grid block corners to determine the average residual activity for the 1 m² (grid block) area.

Direct measurements were performed using gas proportional detectors coupled to ratemeter-scalers with audible indicators. A smear sample for determining removable activity was obtained from the

grid block at the location corresponding to the maximum direct measurement and from each single point measurement location. Measurement and sampling locations are shown in Figures 4 through 11.

Exposure Rate Measurements

The Rockwell-determined average interior background exposure rates were used for building exposure rate comparisons (Rockwell 1996). ESSAP performed verification exposure rate measurements at 1 m above the floor surface using a pressurized ionization chamber (PIC). Measurement locations are shown in Figures 4 through 11.

SURVEY PROCEDURES: EXTERIOR

The following procedures were used for the loading dock and concrete slab located on the north, south, and west sides of Building T363.

Reference System

Measurement and sampling locations were referenced to prominent building features.

Surface Scans

Surface scans of outdoor areas for alpha, beta, and gamma activity were performed using NaI scintillation and gas proportional detectors coupled to ratemeters or ratemeter-scalers with audible indicators. Areas of elevated direct radiation were marked for further investigation.

Surface Activity Measurements

Direct measurements for total alpha and total beta activity were performed at ten randomly selected locations. In one area, where elevated direct radiation was detected by surface scans, an additional set of five direct measurements was taken to determine the average residual activity for the 1 m² area.

These measurements were performed at the center and at four points equidistant from the center and grid block corners.

Direct measurements were performed using gas proportional detectors coupled to ratemeter-scalers with audible indicators. A smear sample for determining removable activity was obtained from the grid block at the location corresponding to the maximum direct measurement and from each single point measurement location. Measurement and sampling locations are shown in Figure 12.

SAMPLE ANALYSIS AND DATA INTERPRETATION

Samples and data were returned to ORISE's ESSAP laboratory in Oak Ridge, TN for analysis and interpretation. Smears were analyzed for gross alpha and gross beta activity using a low-background gas proportional counter. Sample analysis was performed in accordance with the ORISE/ESSAP Laboratory Procedures Manual (ORISE 1995c). Smear data and direct measurement data for surface activity levels were converted to units of disintegrations per minute per 100 square centimeters (dpm/100 cm²). Exposure rates were reported in units of microroentgens per hour (μ R/h).

Additional information regarding major instrumentation, sampling equipment, and analytical procedures is provided in Appendices A and B.

FINDINGS AND RESULTS

DOCUMENT REVIEW

Overall, the Rockwell/Rocketdyne final status survey procedures were appropriate for detection of residual contamination. The survey report data provided adequate documentation of Building T363's radiological status relative to the DOE's guidelines for release for unrestricted use. Comments were provided to DOE in a September 9, 1996 correspondence (ORISE 1996b).

INTERIOR

The results for interior portions of Building T363 are discussed below.

Surface Scans

Surface scans identified one area of elevated direct beta radiation on the north door of Bay 4. All other surface scans for alpha, beta, and gamma activity were within the range of ambient site background.

Surface Activity Levels

Results of total and removable activity are summarized in Table 1. Total activity levels ranged from less than 34 to 61 dpm/100 cm² and less than 230 to 4,600 dpm/100 cm² for alpha and beta, respectively. The 1 m² average activity surrounding the location of maximum direct beta radiation was 420 dpm/100 cm². Removable activity levels were less than 9 dpm/100 cm² for gross alpha and less than 15 dpm/100 cm² for gross beta.

Exposure Rates

Exposure rates are summarized in Table 2. Site exposure rates ranged from 10 to 13 μR/h. The Rockwell-determined average interior background exposure rate was 13 μR/h.

EXTERIOR

The survey result for the loading dock and concrete slab are discussed below.

Surface Scans

Surface scans identified one area of elevated direct beta radiation on the concrete slab adjacent to the north door of Bay 4. All other surface scans for beta and gamma activity were within the range of ambient site background.

Surface Activity Levels

Results of total and removable activity are summarized in Table 1. Total activity levels ranged from less than 34 to 110 dpm/100 cm² and 330 to 6,200 dpm/100 cm² for alpha and beta, respectively. The 1 m² average activity level was 79 dpm/100 cm² for alpha and 1,300 dpm/100 cm² for beta in the area of elevated direct radiation identified outside of Bay 4. Removable activity levels were less than 9 dpm/100 cm² for gross alpha and less than 15 dpm/100 cm² for gross beta.

COMPARISON OF RESULTS WITH GUIDELINES

A summary of the DOE guidelines for residual radioactive material are included as Appendix C. The primary contaminants of concern for this site are uranium and mixed fission and activation products.

The applicable guidelines for uranium are as follows (DOE 1990 and 1993):

Total Activity

5,000 α dpm/100 cm², average in a 1 m² area

15,000 α dpm/100 cm², maximum in a 100 cm² area

Removable Activity

1000 α dpm/100 cm²

The guidelines for beta-gamma emitters are (DOE 1990 and 1993):

Total Activity

5,000 β - γ dpm/100 cm², average in a 1 m² area

15,000 β - γ dpm /100 cm², maximum in a 100 cm² area

Removable Activity

1,000 β - γ dpm/100 cm²

The surface activity level at one measurement location exceeded 5,000 β - γ dpm /100 cm². However, when this location was averaged with the surface activity within the surrounding 1 m² area, the guideline was satisfied. All other total and removable alpha and beta surface activity levels were less than the respective guidelines.

The DOE's exposure rate guideline is 20 μ R/h above background, although Rockwell has elected to use a more restrictive guideline of 5 μ R/h above background. Exposure rates measured at one meter above the surface were consistent with ambient background and therefore within the guideline.

SUMMARY

During the period of July 29 through 31, 1996, the Environmental Survey and Site Assessment Program performed verification survey activities for Building T363 at the Santa Susana Field Laboratory located in Ventura County, California. Verification activities included document reviews, surface scans, surface activity measurements, and exposure rate measurements.

The independent verification survey results indicate that surface activity levels for Building T363 were below the total and removable residual surface activity guidelines. In addition, exposure rates were comparable to background levels and satisfied both the DOE and the more restrictive exposure rate guideline that Rockwell has elected to use. The verification survey findings, therefore, support Rockwell's final status survey conclusion that the radiological conditions of Building T363 satisfy the DOE guidelines for release without radiological restrictions.

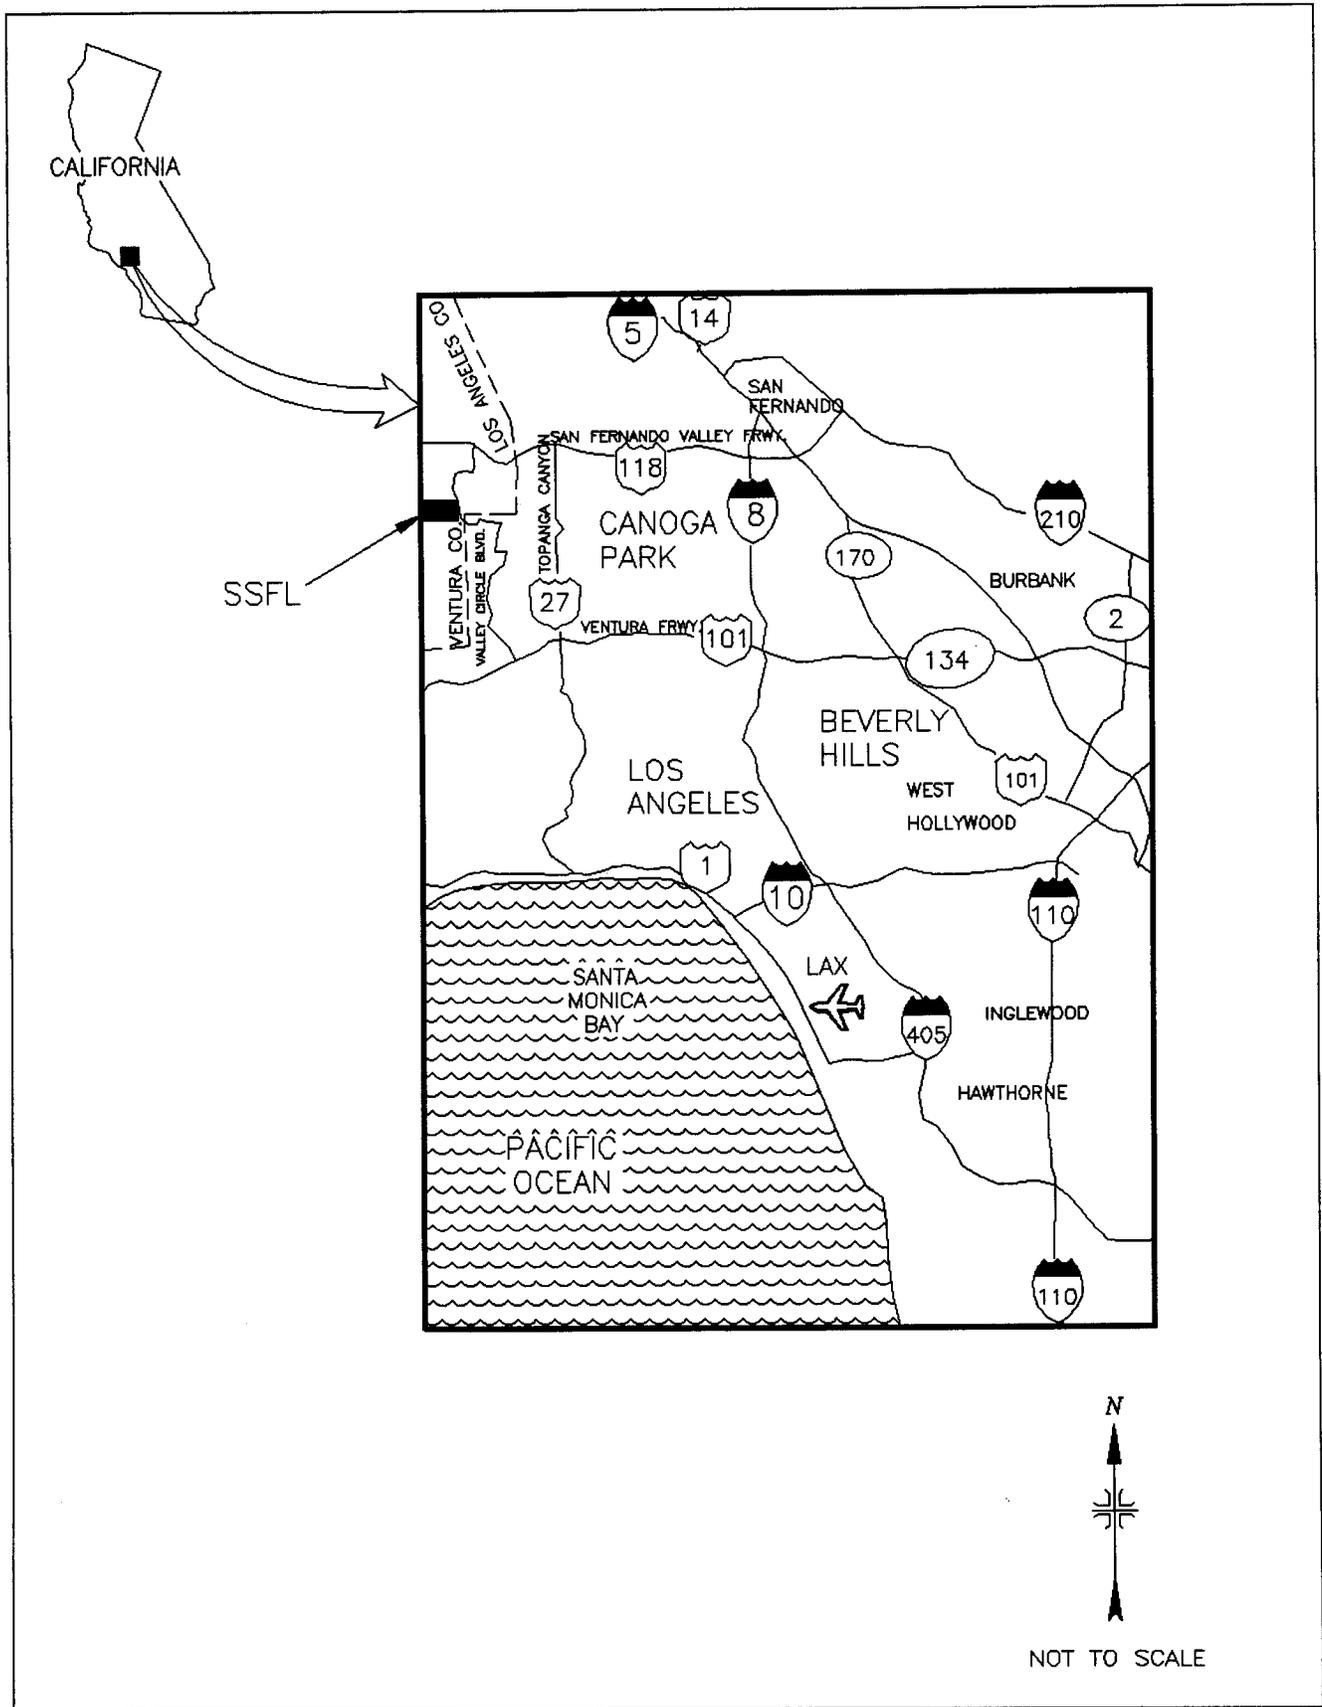


FIGURE 1: Los Angeles, California Area – Location of the Santa Susana Field Laboratory Site

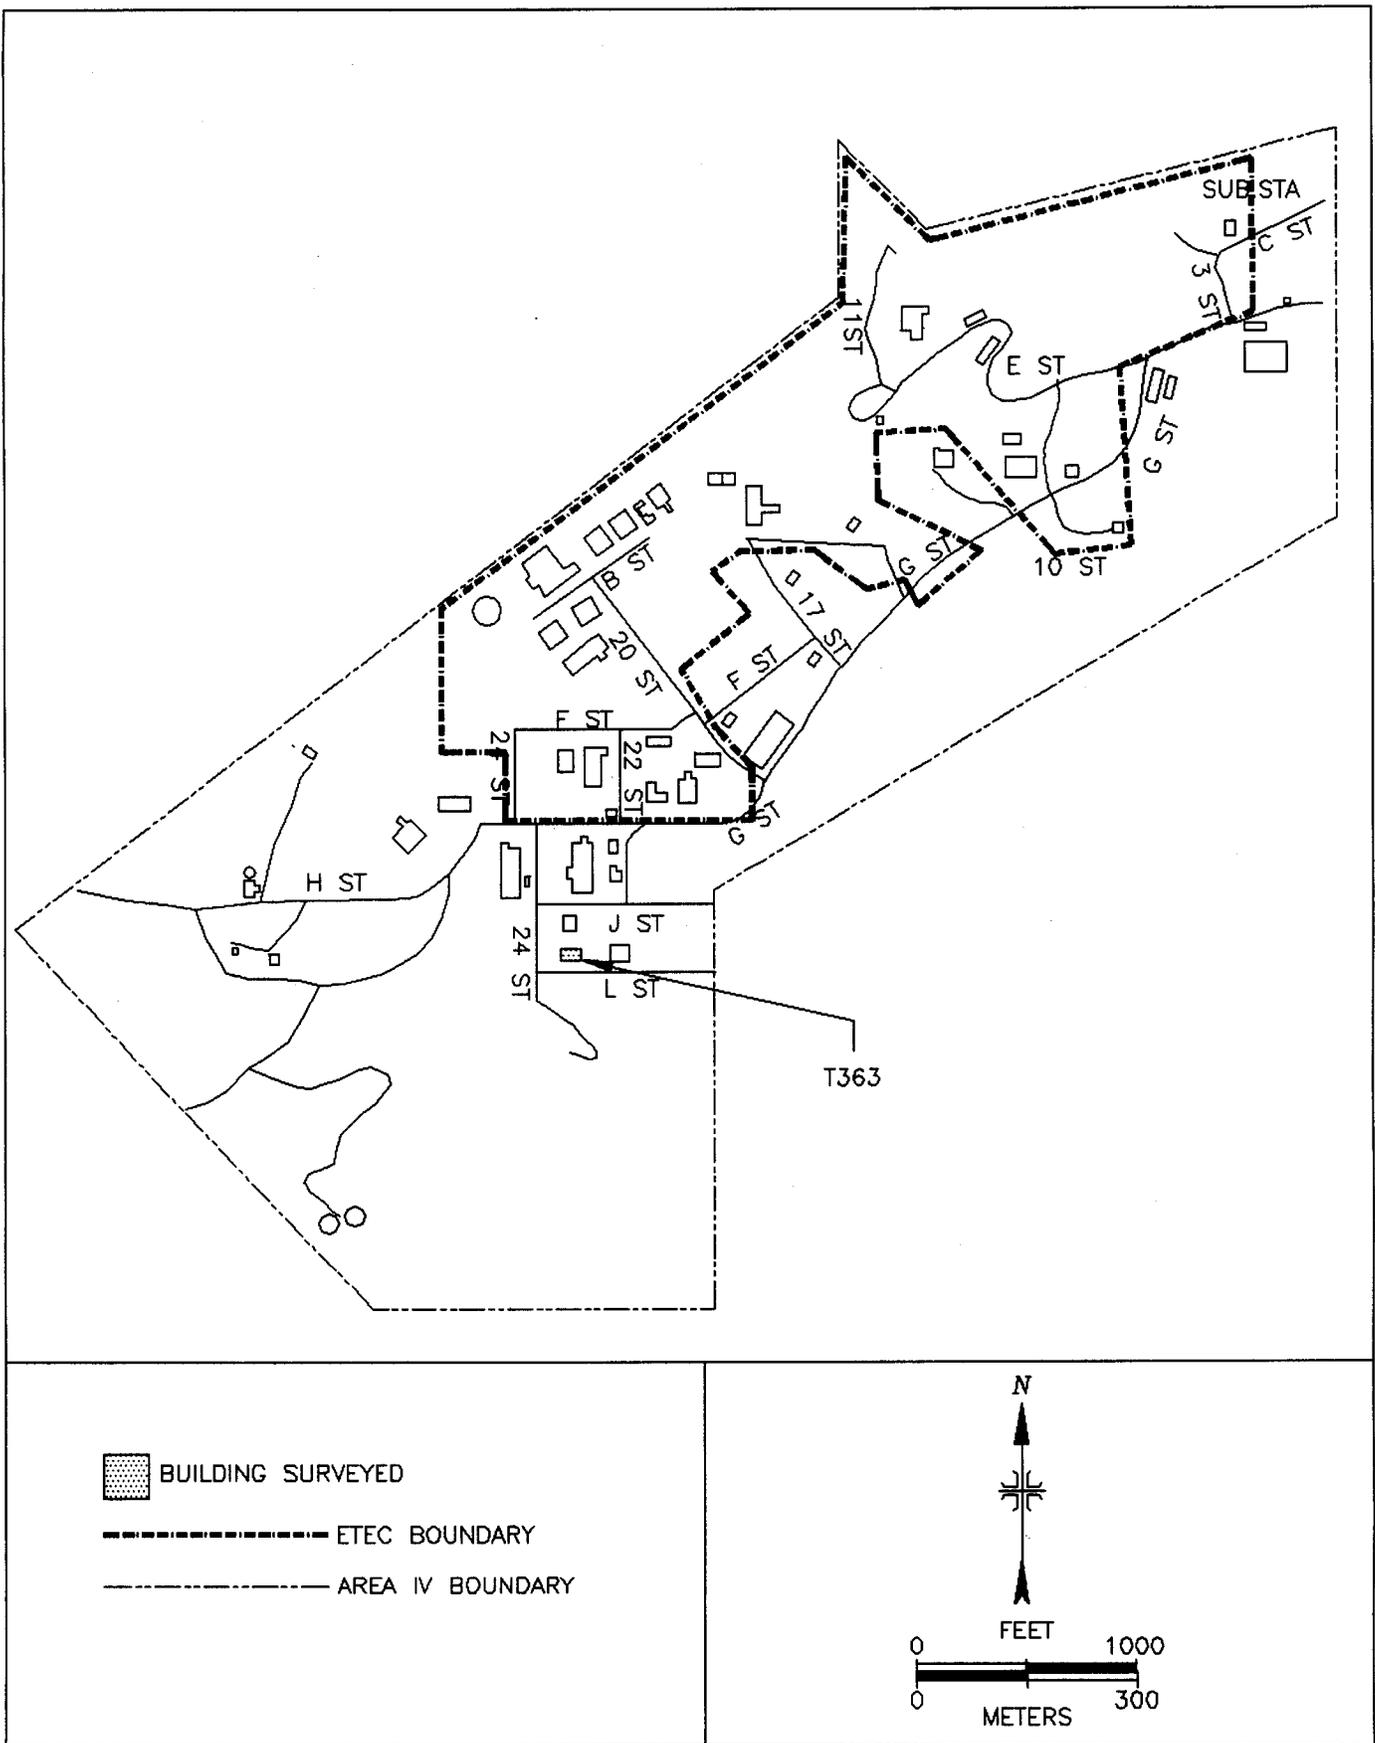


FIGURE 2: Santa Susana Field Laboratory Area IV, Plot Plan – Location of Building T363

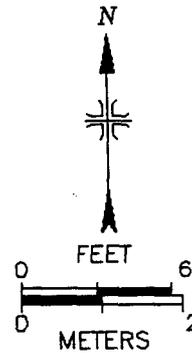
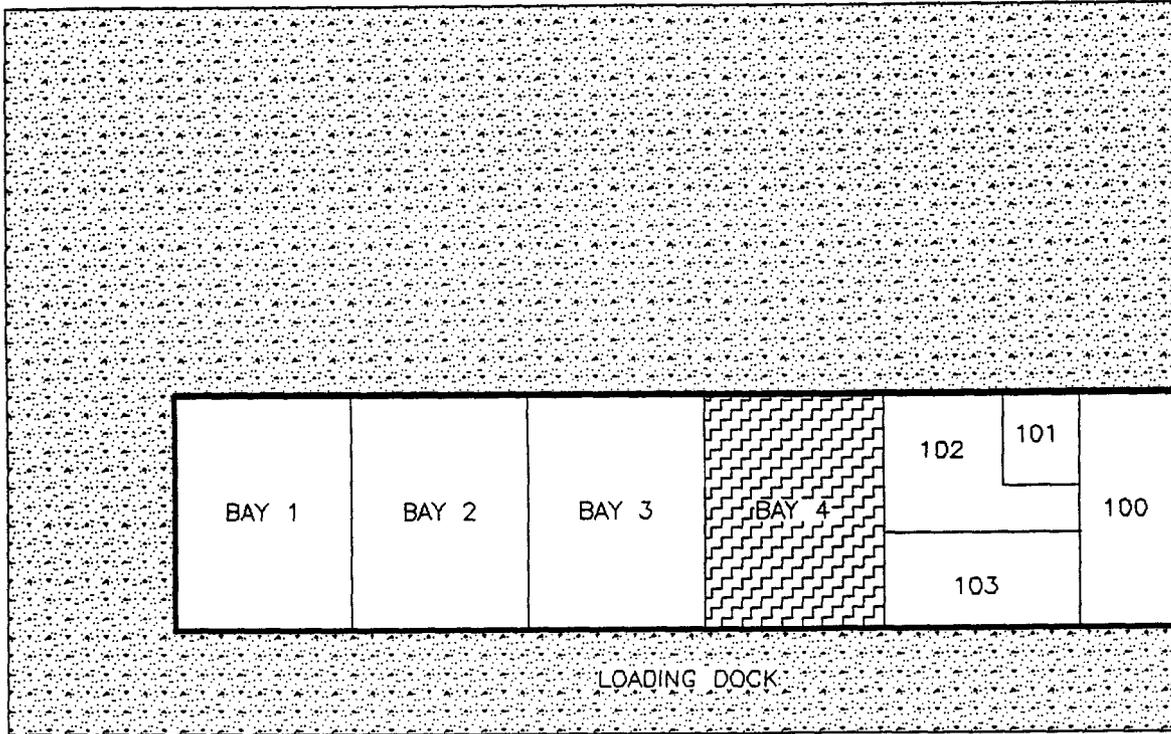


FIGURE 3: Building T363 - Plot Plan

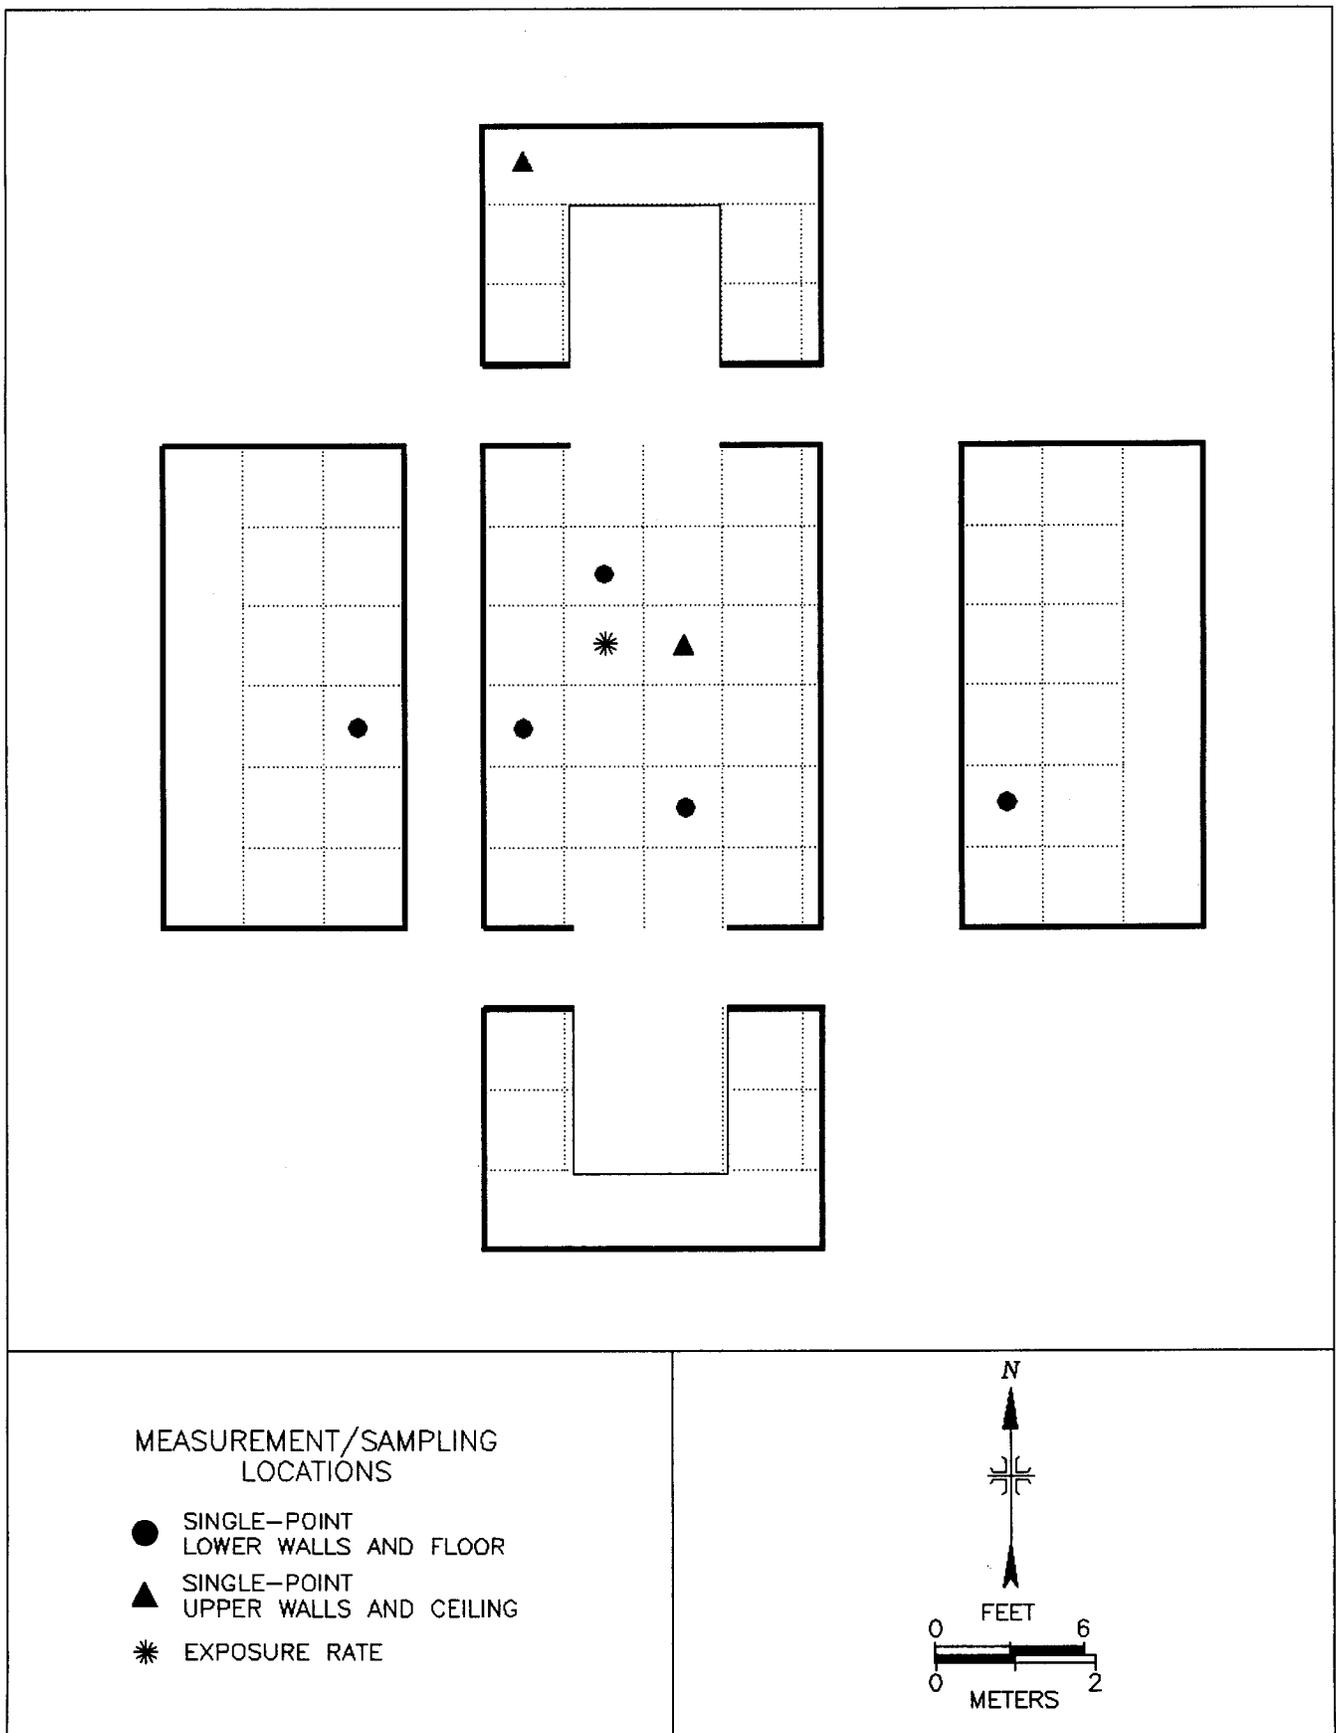


FIGURE 4: Building T363, Bay 1 – Measurement and Sampling Locations

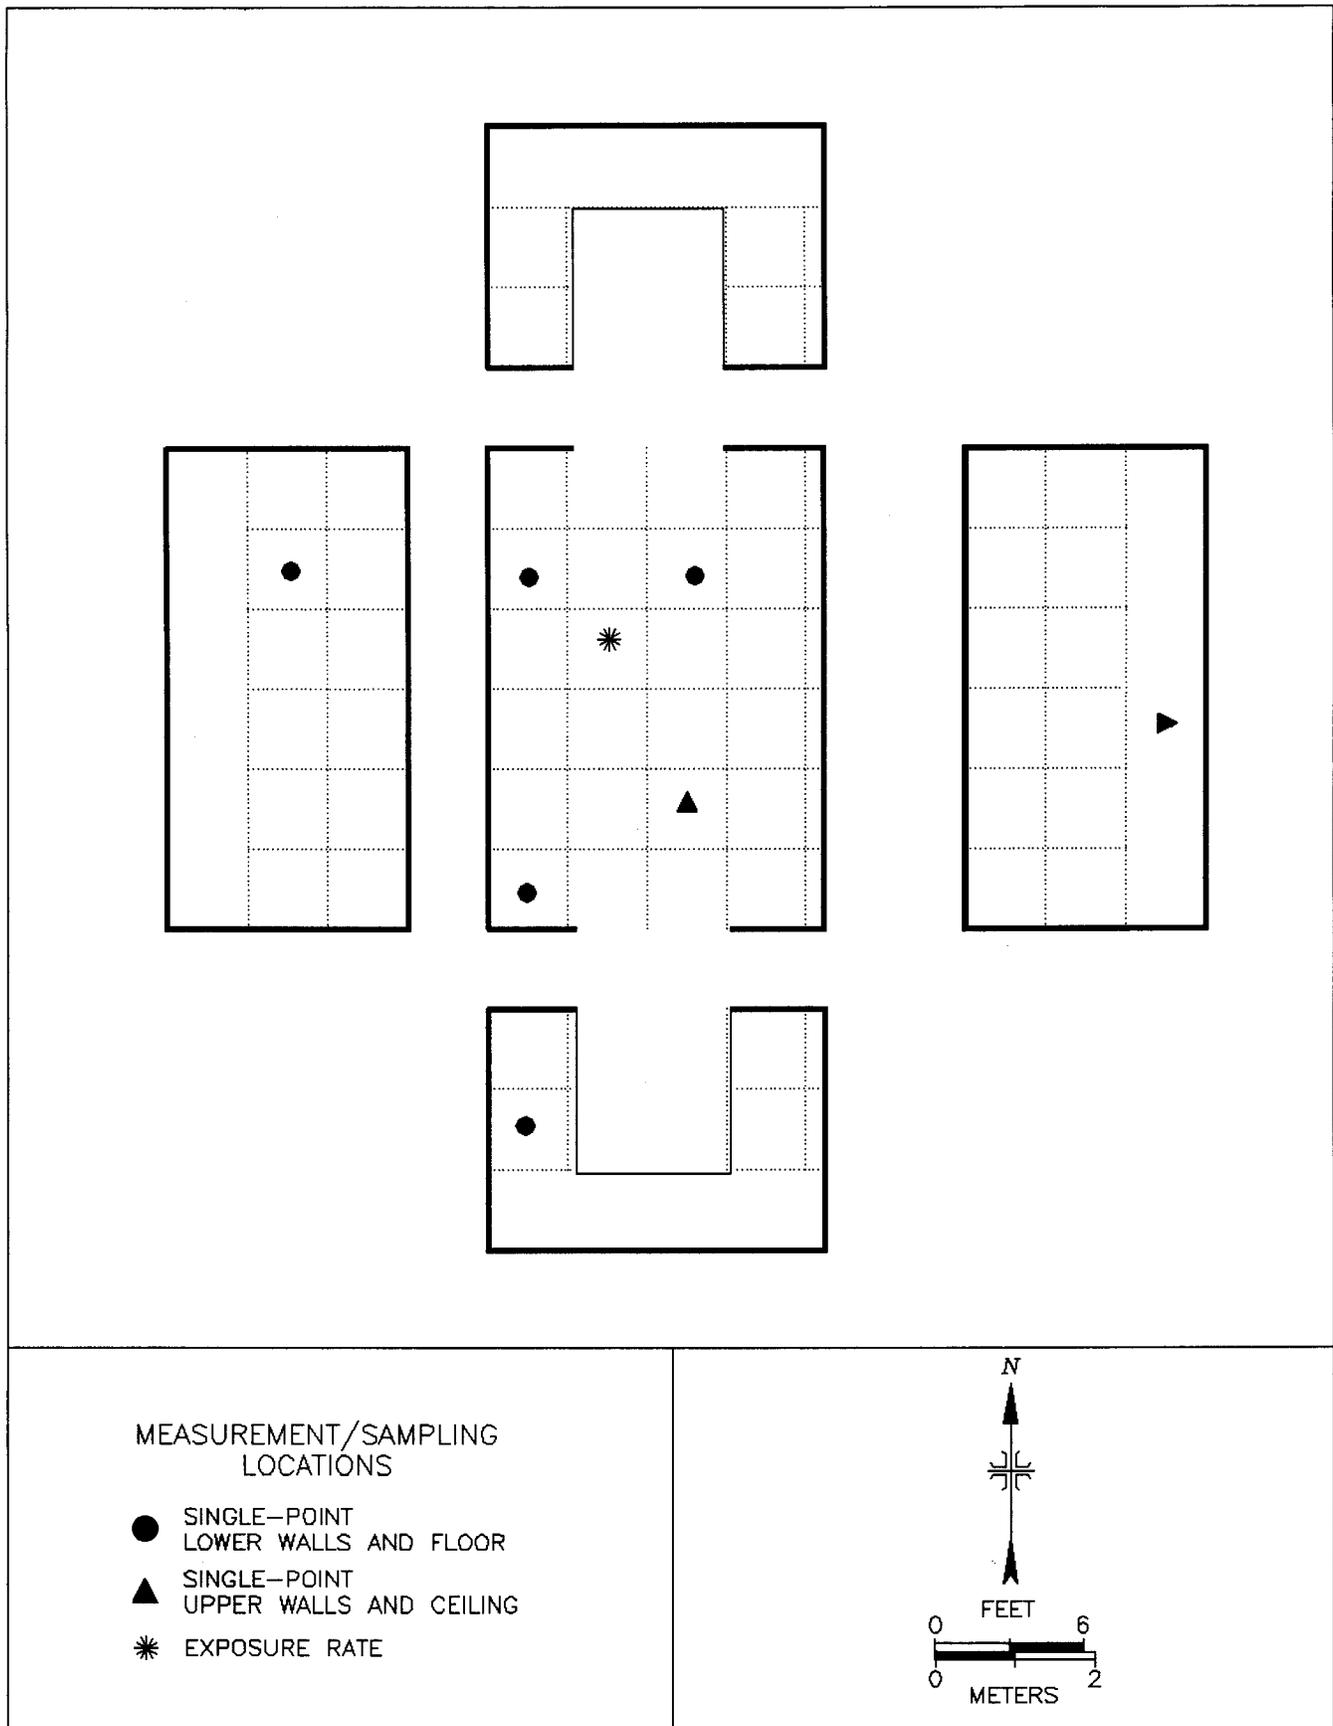


FIGURE 5: Building T363, Bay 2 - Measurement and Sampling Locations

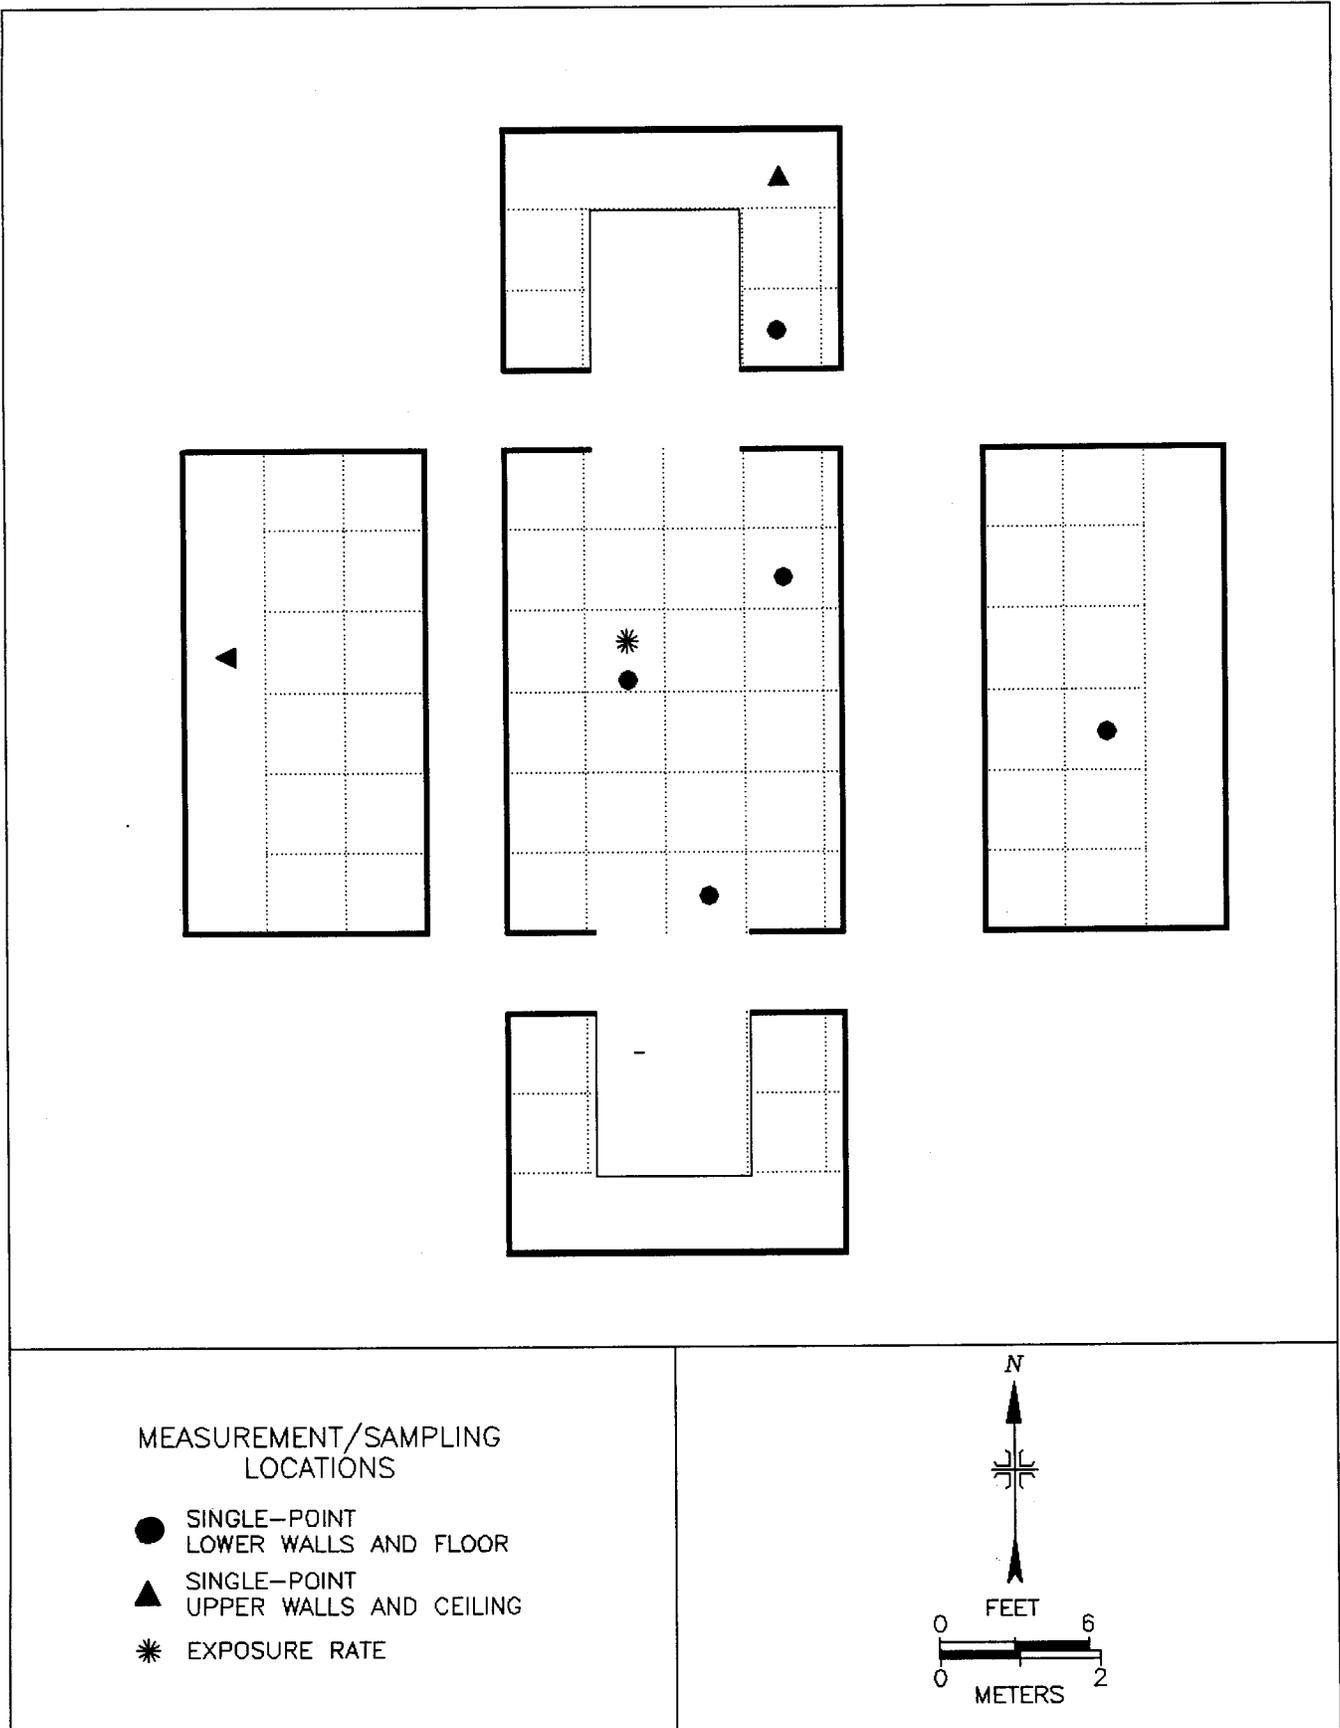


FIGURE 6: Building T363, Bay 3 – Measurement and Sampling Locations

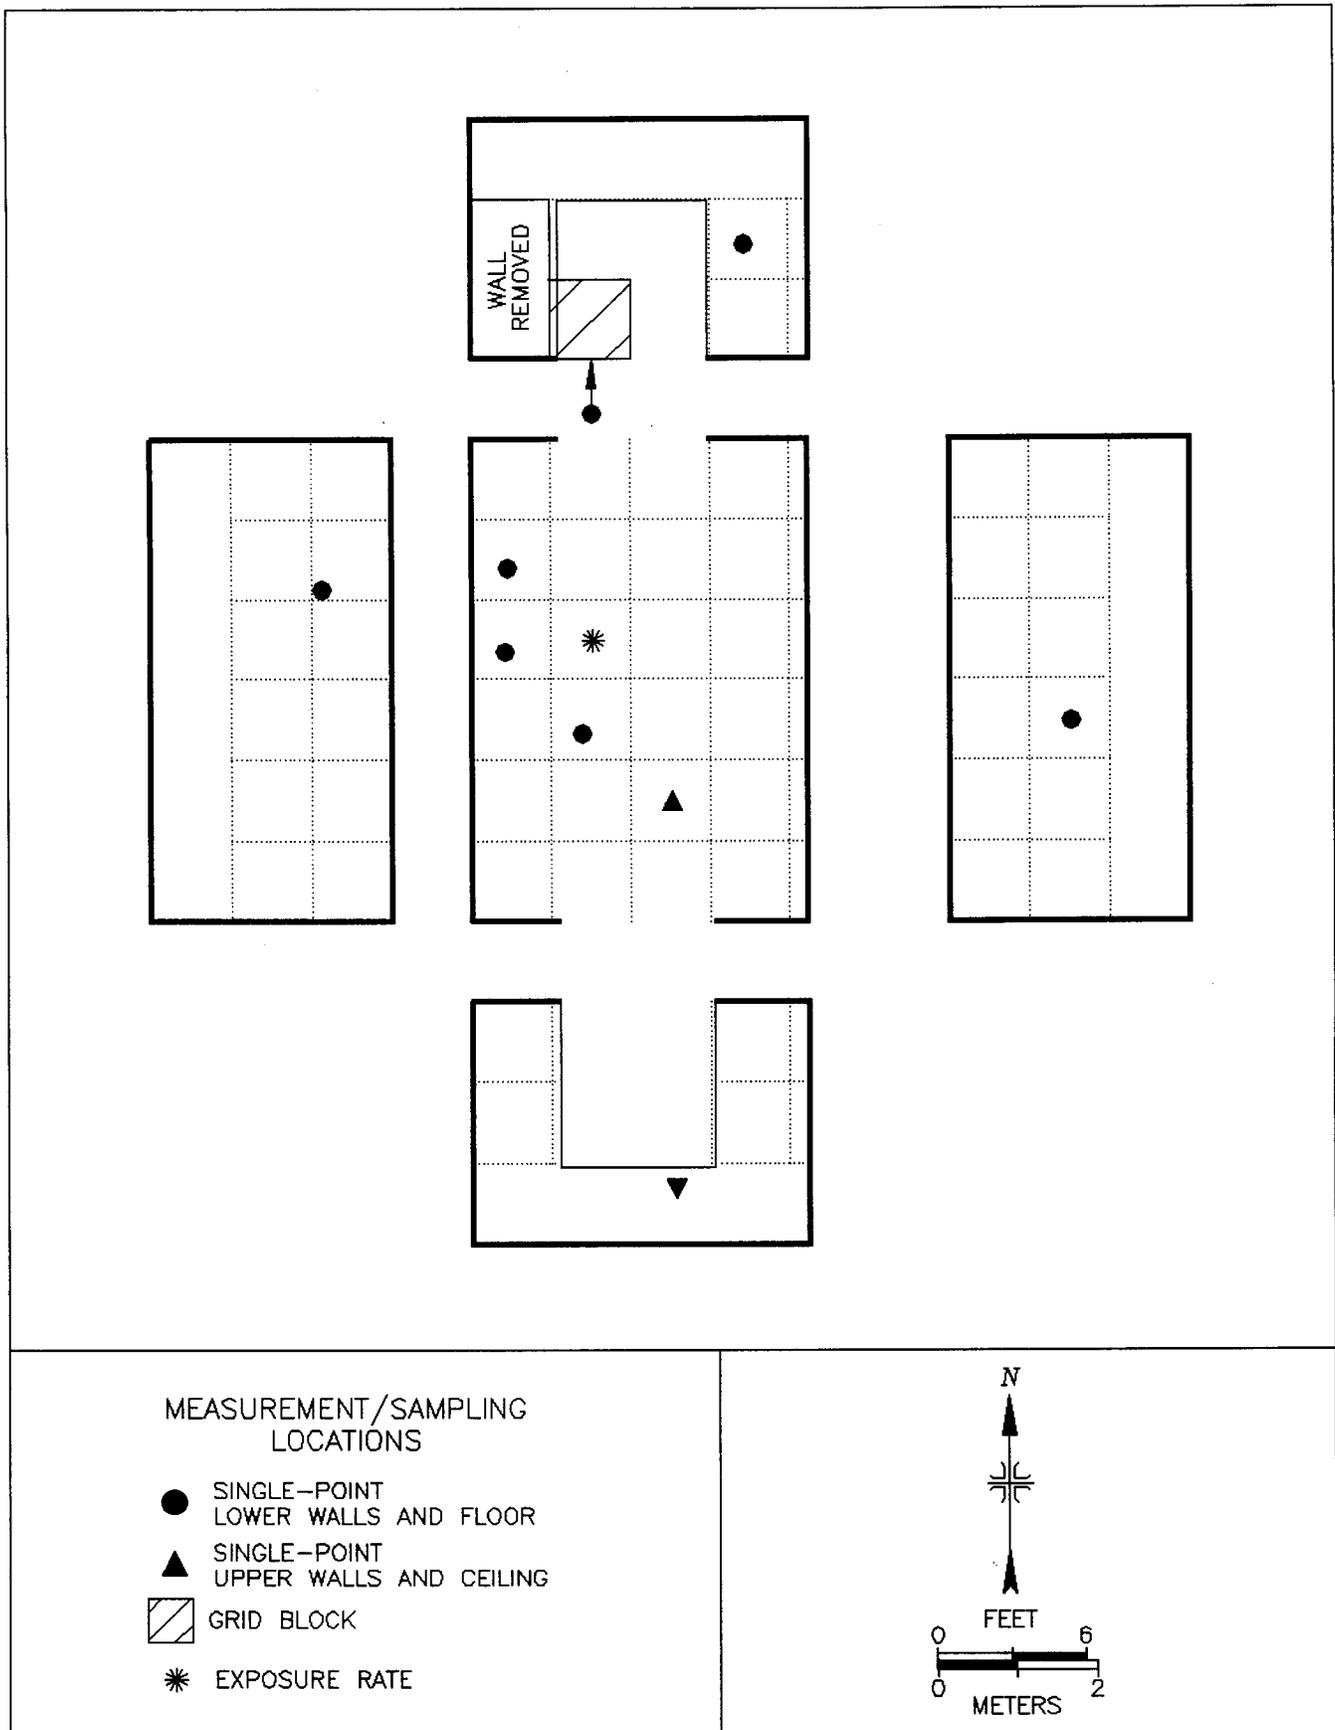


FIGURE 7: Building T363, Bay 4 – Measurement and Sampling Locations

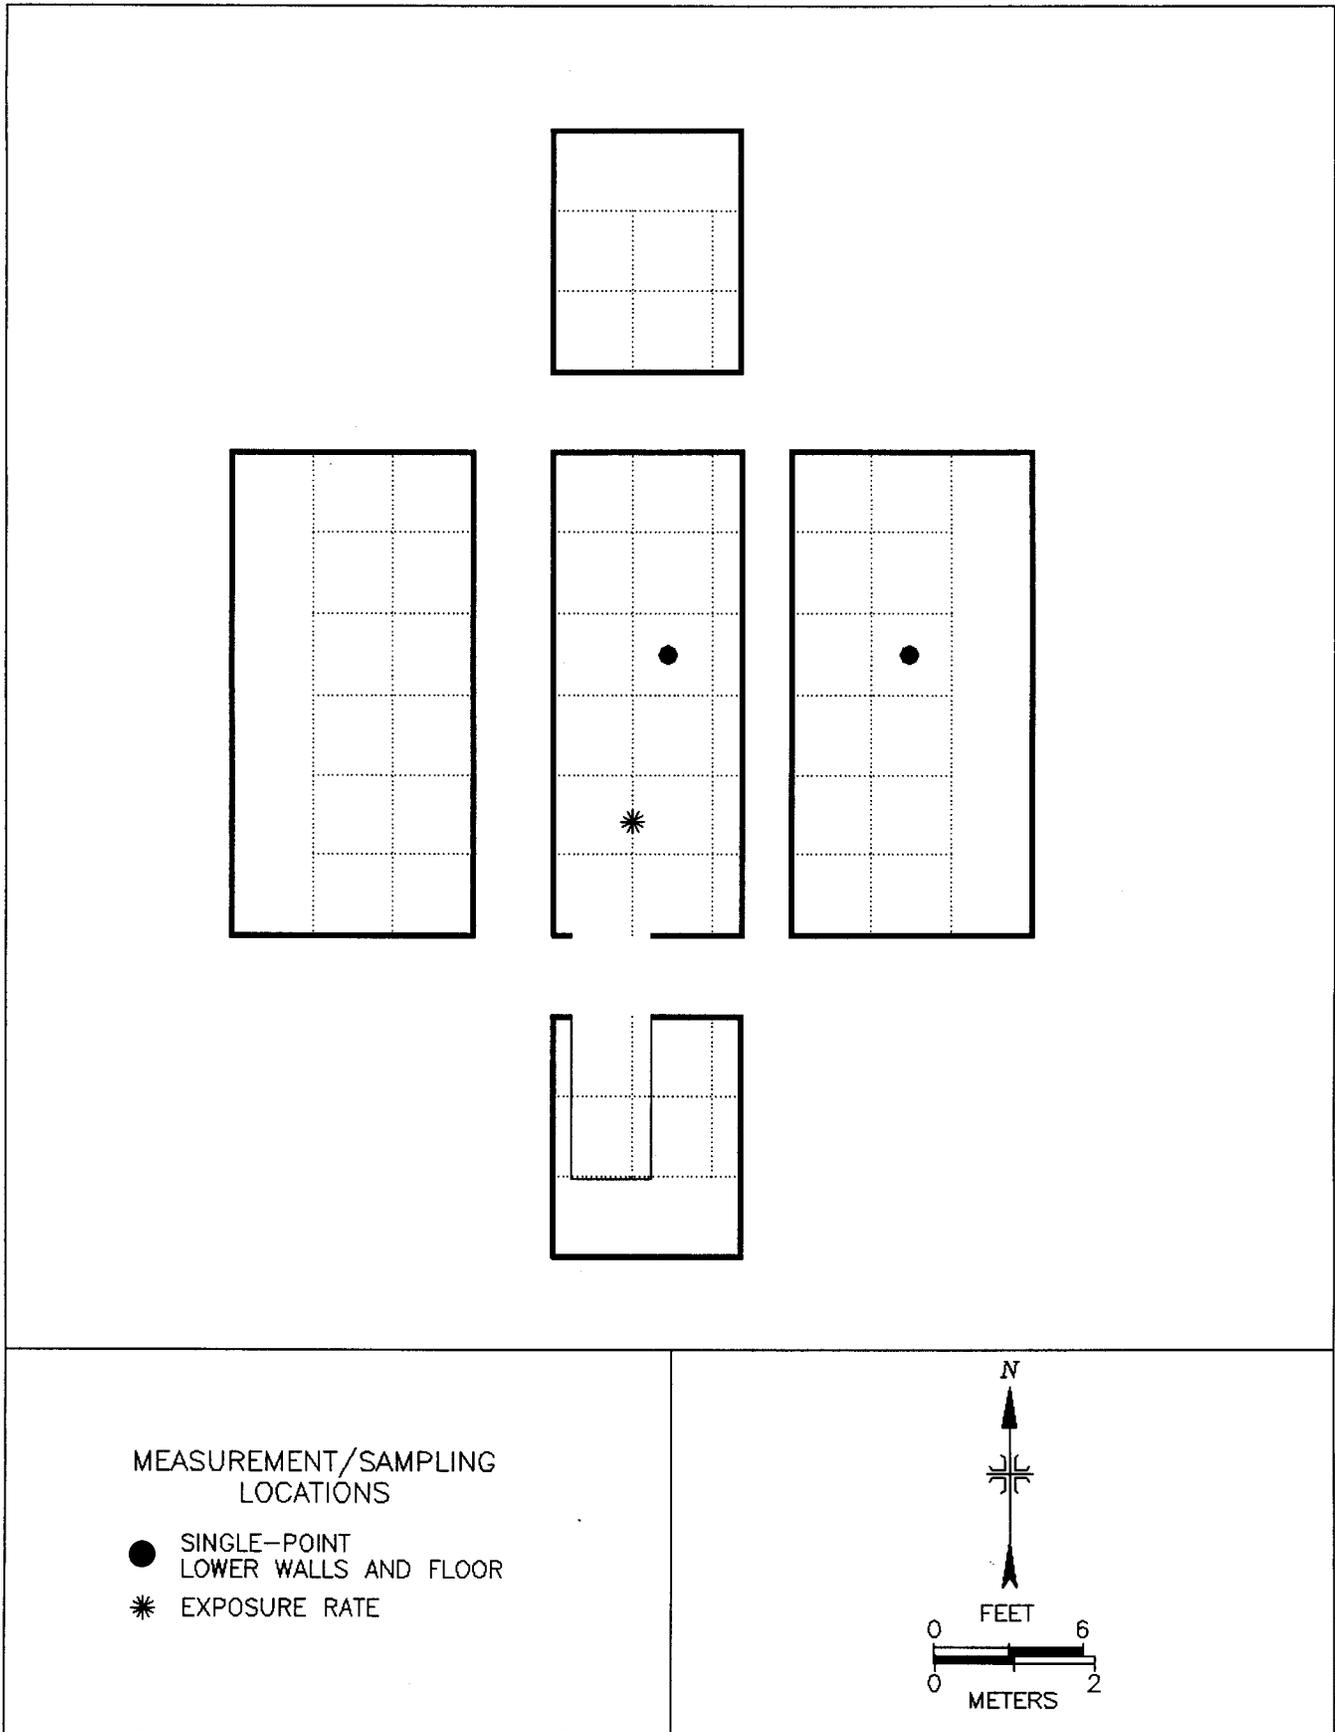


FIGURE 8: Building T363, Room 100 – Measurement and Sampling Locations

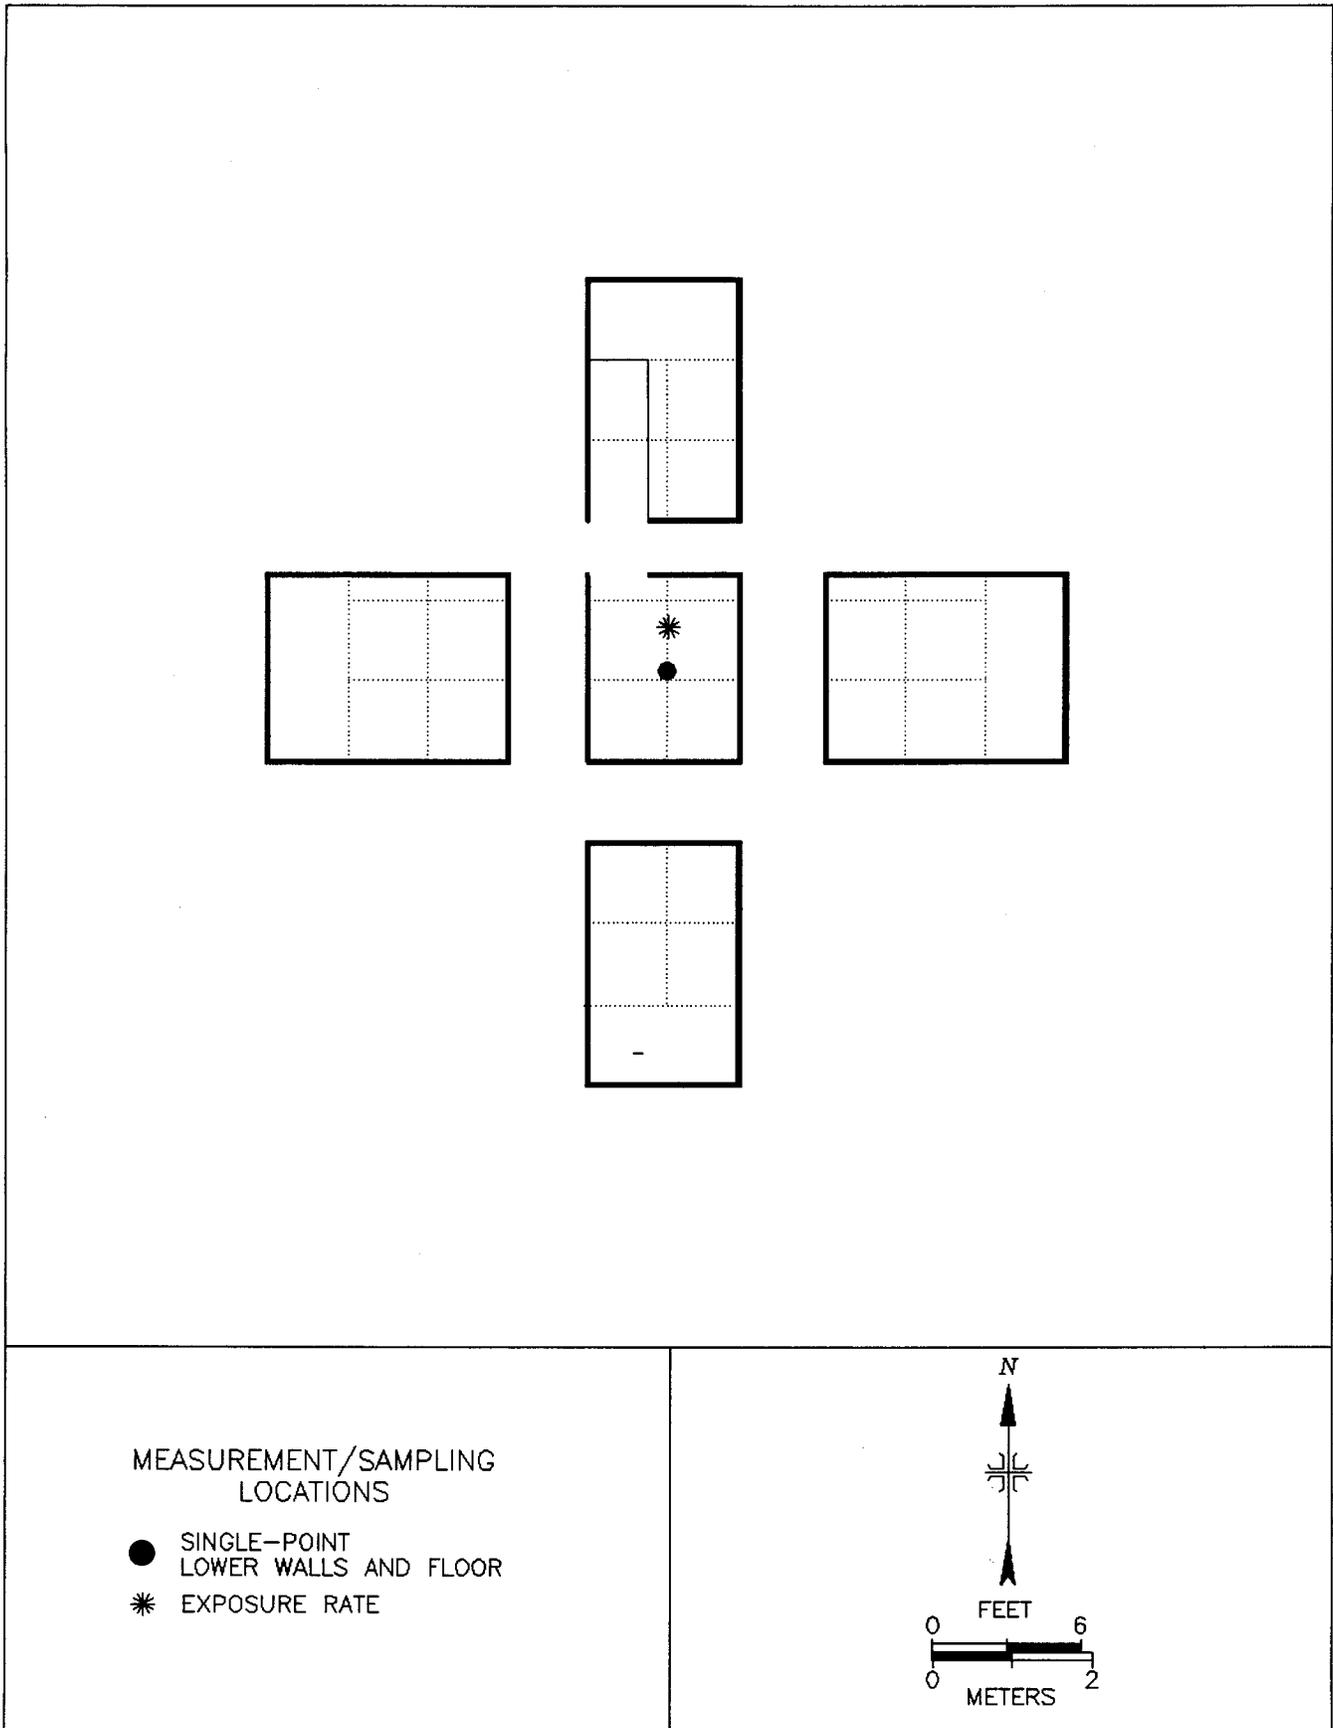


FIGURE 9: Building T363, Room 101 – Measurement and Sampling Locations

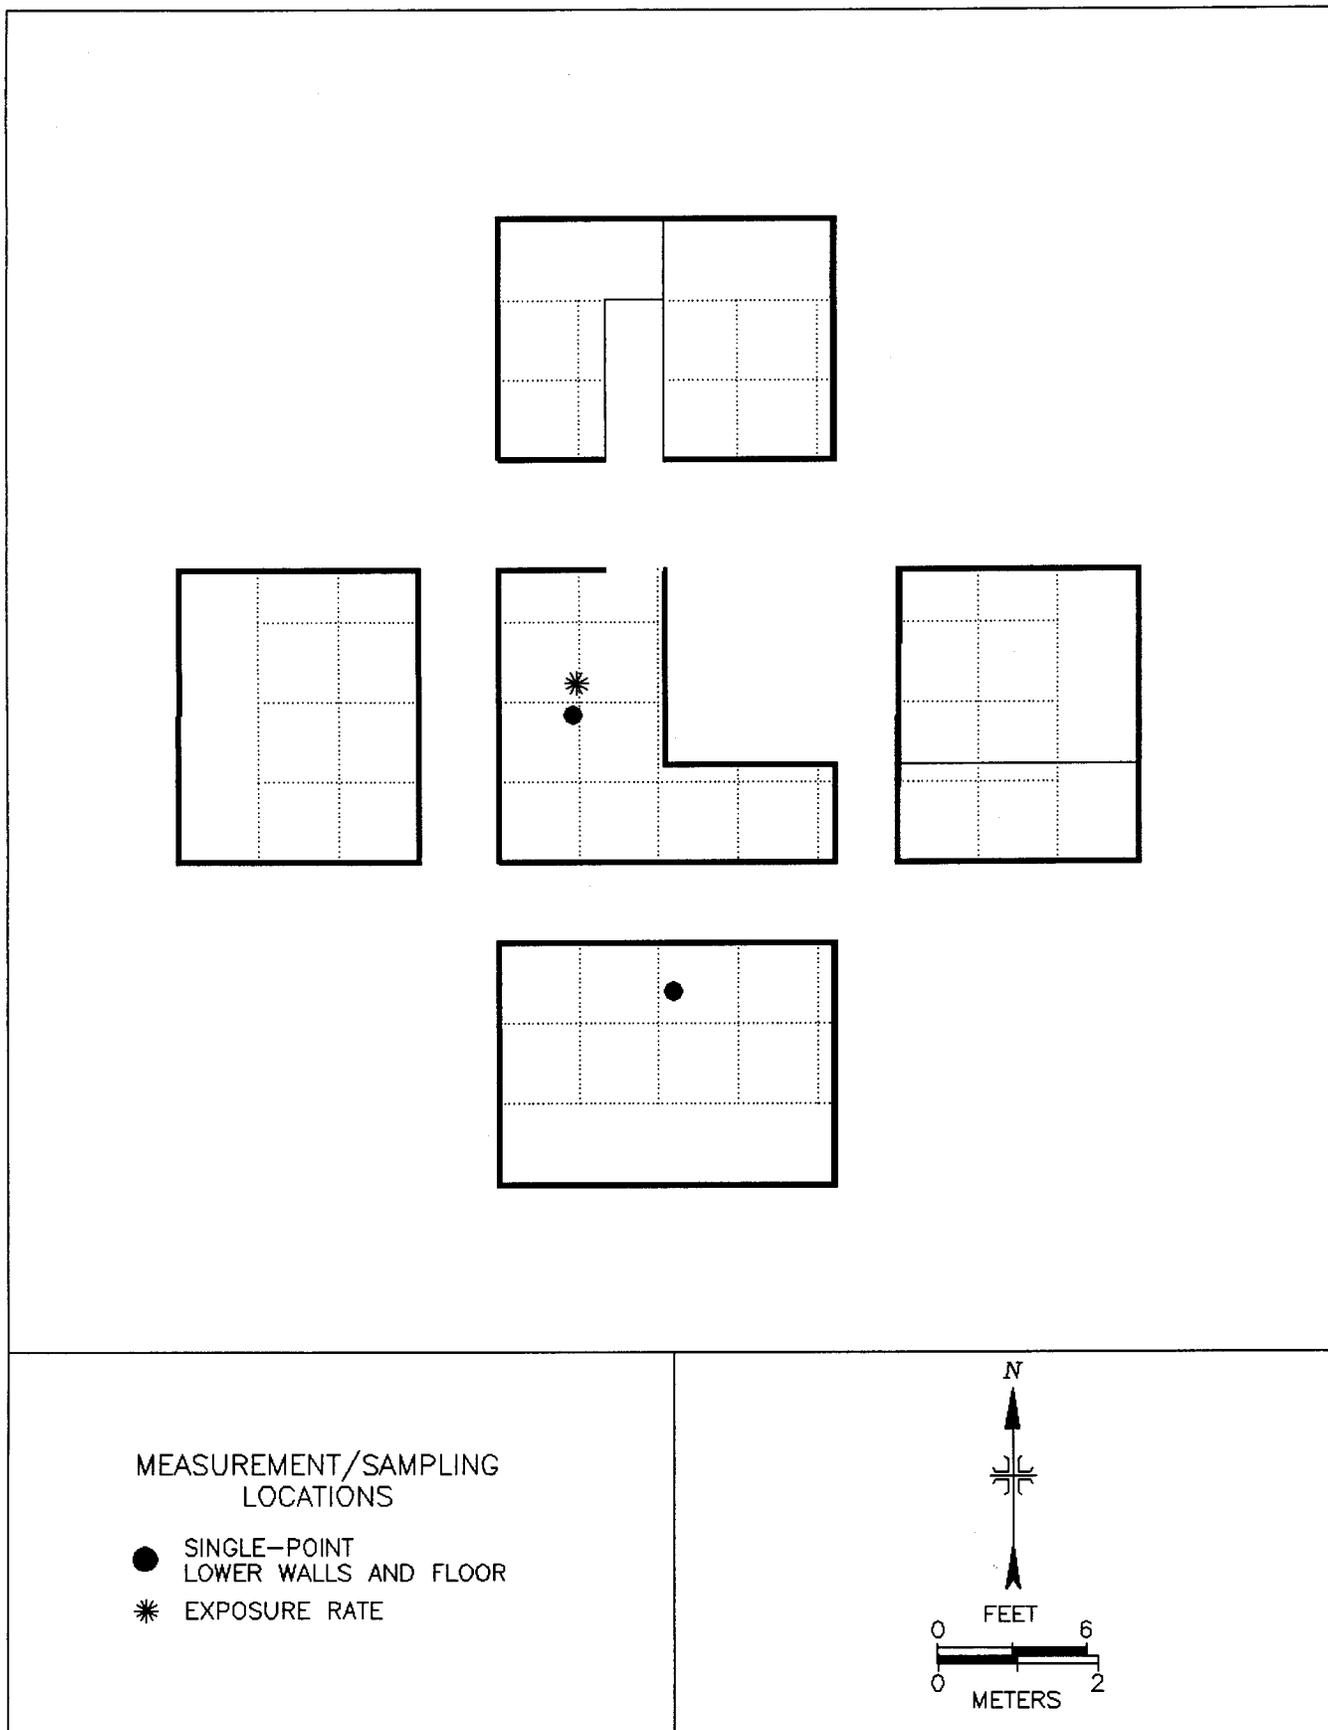


FIGURE 10: Building T363, Room 102 – Measurement and Sampling Locations


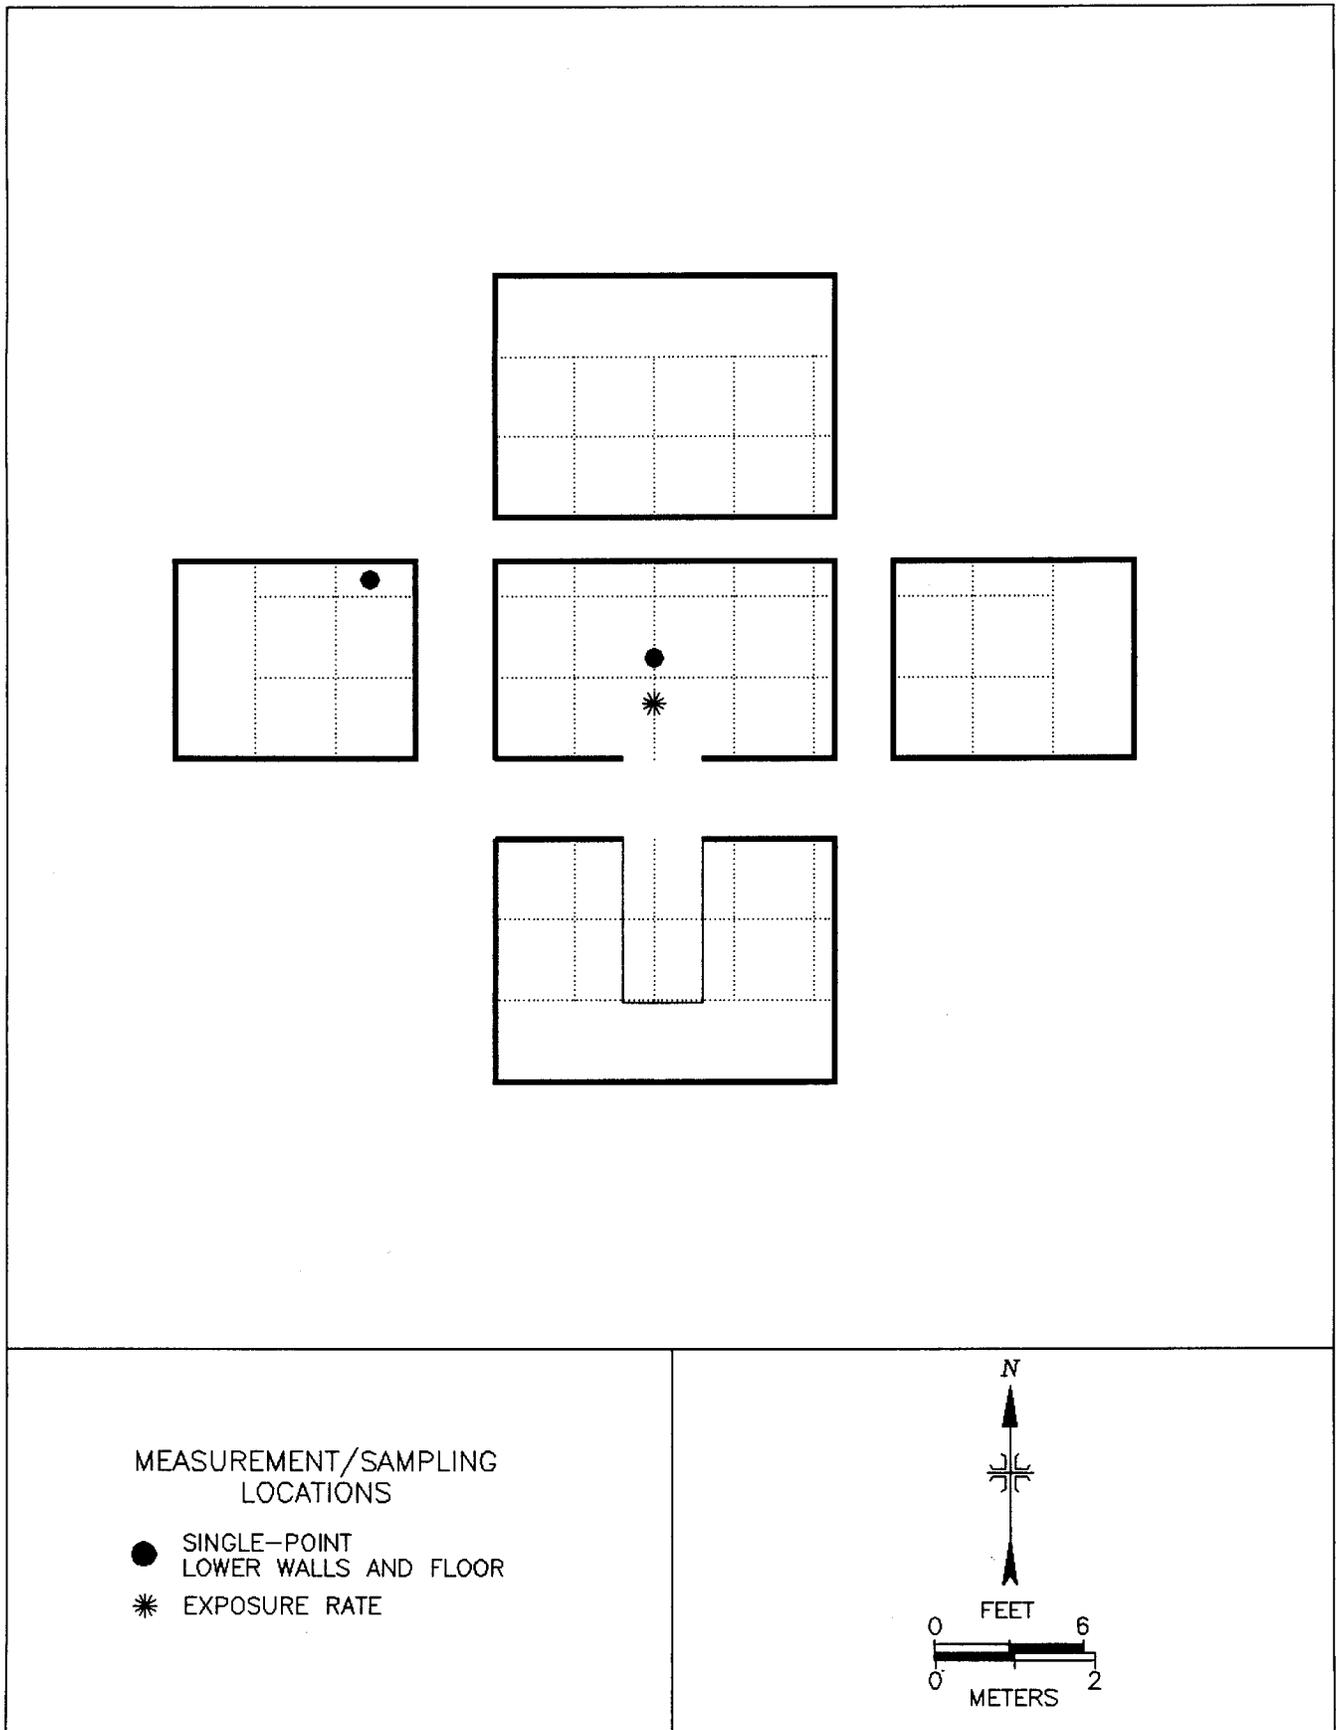


FIGURE 11: Building T363, Room 103 – Measurement and Sampling Locations

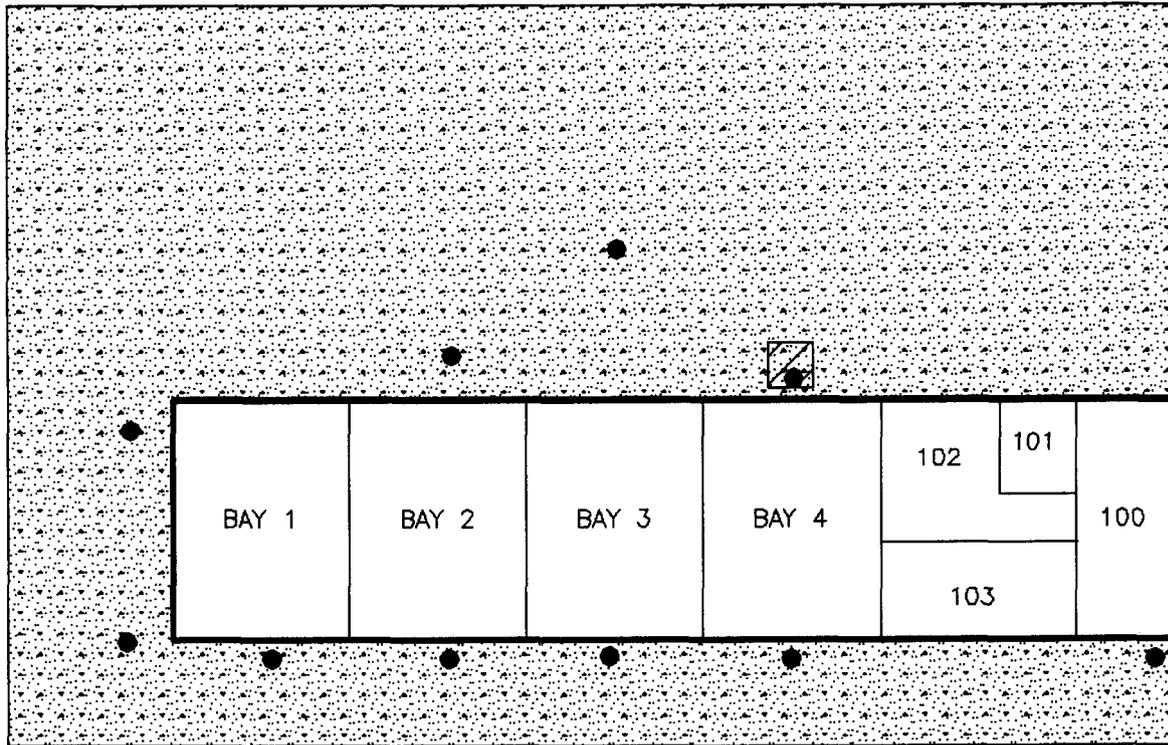

MEASUREMENT/SAMPLING LOCATIONS

● SINGLE-POINT

▧ GRID BLOCK

▣ CONCRETE PAD

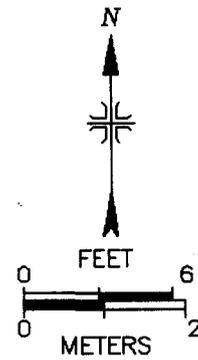


FIGURE 12: Building T363, Exterior – Measurement and Sampling Locations

TABLE 1

**SUMMARY OF SURFACE ACTIVITY LEVELS
BUILDING T363
SANTA SUSANA FIELD LABORATORY
ROCKWELL INTERNATIONAL
VENTURA COUNTY, CALIFORNIA**

Location*	Number of Measurement Locations	Range of Total Activity (dpm/100 cm ²)		Range of Removable Activity (dpm/100 cm ²)	
		Single Measurement		Alpha	Beta
		Alpha	Beta		
INTERIOR					
Bay 1					
Floor	3	<34	<230	<9	<15
Lower Walls	2	<34	<230	<9	<15
Upper Surfaces	2	<34	<230	<9	<15
Bay 2					
Floor	3	<34	<230	<9	<15
Lower Walls	2	<34	<230	<9	<15
Upper Surfaces	2	<34	<230	<9	<15
Bay 3					
Floor	3	<34 to 37	<230 to 260	<9	<15
Lower Walls	2	<34	<230	<9	<15
Upper Surfaces	2	<34	<230	<9	<15
Bay 4					
Floor	3	<34	500 to 600	<9	<15
Lower Walls	9	<34	<230 to 4,600	<9	<15
Upper Surfaces	2	<34	<230	<9	<15

TABLE 1 (Continued)

**SUMMARY OF SURFACE ACTIVITY LEVELS
BUILDING T363
SANTA SUSANA FIELD LABORATORY
ROCKWELL INTERNATIONAL
VENTURA COUNTY, CALIFORNIA**

Location ^a	Number of Measurement Locations	Range of Total Activity (dpm/100 cm ²)		Range of Removable Activity (dpm/100 cm ²)	
		Single Measurement		Alpha	Beta
		Alpha	Beta		
Room 100					
Floor	1	<34	380	<9	<15
Lower Wall	1	<34	<230	<9	<15
Room 101					
Floor	1	<34	<230	<9	<15
Room 102					
Floor	1	<34	470	<9	<15
Lower Wall	1	<34	<230	<9	<15
Room 103					
Floor	1	61	<230	<9	<15
Lower Wall	1	<34	<230	<9	<15
EXTERIOR					
Loading Dock and Concrete Slab	14	<34 to 110	330 to 6,200	<9	<15

^aRefer to Figures 4 through 12.

TABLE 2
EXPOSURE RATES
BUILDING T363
SANTA SUSANA FIELD LABORATORY
ROCKWELL INTERNATIONAL
VENTURA COUNTY, CALIFORNIA

Location ^a	Exposure Rate at 1 m (μ R/h)
Bay 1	13
Bay 2	13
Bay 3	13
Bay 4	13
Room 100	11
Room 101	10
Room 102	11
Room 103	11

^aRefer to Figures 4 through 11.

REFERENCES

Oak Ridge Institute for Science and Education (ORISE). Survey Procedures Manual for the Energy/Environment Systems Division, Environmental Survey and Site Assessment Program, Revision 9. Oak Ridge, TN; April 30, 1995a.

Oak Ridge Institute for Science and Education. Quality Assurance Manual for the Energy/Environment Systems Division, Environmental Survey and Site Assessment Program, Revision 7. Oak Ridge, TN; January 31, 1995b.

Oak Ridge Institute for Science and Education. Laboratory Procedures Manual for the Energy/Environment Systems Division, Environmental Survey and Site Assessment Program, Revision 9. Oak Ridge, TN; January 31, 1995c.

Oak Ridge Institute for Science and Education. Revised Verification Survey Plan for Building T012 and T363, Santa Susana Field Laboratory, Rockwell International, Ventura County, California. Oak Ridge, TN; July 18, 1996a.

Oak Ridge Institute for Science and Education. Comments on the Final Radiological Survey Reports for Buildings T012 and T363, Santa Susana Field Laboratory, Ventura County, California. Oak Ridge, TN; September 9, 1996b.

Rocketdyne Division, Rockwell International Corporation (Rockwell). Final Radiological Survey Report for Building T363. Canoga Park, CA; June 21, 1996.

U. S. Department of Energy (DOE). Radiation Protection of the Public and the Environment. Washington, DC: DOE Order 5400.5; February 1990 and Change 2, January 1993.

APPENDIX A
MAJOR INSTRUMENTATION

APPENDIX A

MAJOR INSTRUMENTATION

The display of a specific product is not to be construed as an endorsement of the product or its manufacturer by the authors or their employers.

DIRECT RADIATION MEASUREMENT

Instruments

Eberline Pulse Ratemeter
Model PRM-6
(Eberline, Santa Fe, NM)

Ludlum Ratemeter-Scaler
Model 2221
(Ludlum Measurements, Inc.,
Sweetwater, TX)

Ludlum Floor Monitor
Model 239-1
(Ludlum Measurements, Inc.,
Sweetwater, TX)

Detectors

Ludlum Gas Proportional Detector
Model 43-68
Effective Area, 126 cm²
(Ludlum Measurements, Inc.,
Sweetwater, TX)

Ludlum Gas Proportional Detector
Model 43-37
Effective Area, 550 cm²
(Ludlum Measurements, Inc.,
Sweetwater, TX)

Reuter-Stokes Pressurized Ionization Chamber
Model RSS-111
(Reuter-Stokes, Cleveland, OH)

Victoreen NaI Scintillation Detector
Model 489-55
3.2 cm x 3.8 cm crystal
(Victoreen, Cleveland, OH)

LABORATORY ANALYTICAL INSTRUMENTATION

**Low Background Gas Proportional Counter
Model LB-5100-W
(Oxford, Oak Ridge, TN)**

APPENDIX B
SURVEY AND ANALYTICAL PROCEDURES

APPENDIX B

SURVEY AND ANALYTICAL PROCEDURES

SURVEY PROCEDURES

Surface Scans

Surface scans were performed by passing the probes slowly over the surface; the distance between the probe and the surface was maintained at a minimum - nominally about 1 cm. Surfaces were scanned using either a large area gas proportional floor monitor or small area (74 cm² or 126 cm²) hand-held detectors. Identification of elevated levels was based on increases in the audible signal from the recording and/or indicating instrument. Combinations of detectors and instruments used for the scans were:

Alpha - gas proportional detector with ratemeter-scaler

Alpha-Beta - gas proportional detector with ratemeter-scaler

Gamma - NaI scintillation detector with ratemeter

Surface Activity Measurements

Measurements of total alpha and total beta activity levels were performed using gas proportional detectors with portable ratemeter-scalers. Alpha and beta activity measurements were performed on randomly selected areas and at locations of elevated direct radiation using gas proportional detectors with ratemeter-scalers.

Count rates (cpm), which were integrated over 1 minute in a static position, were converted to activity levels (dpm/100 cm²) by dividing the net rate by the 4π efficiency and correcting for the active area of the detector. The alpha activity background count rate was one cpm for all surfaces. The beta activity background count rate was 383 cpm. The alpha efficiency factor was 0.17 calibrated to Th-230. The beta efficiency factor was 0.33 calibrated to Tl-204. The alpha minimum detectable concentration (MDC) was 34 dpm/100 cm², while the beta activity MDC was 230 dpm/100 cm². The effective window area for the gas proportional detectors was 126 cm².

Removable Activity Measurements

Removable activity levels were determined using numbered filter paper disks, 47 mm in diameter. Moderate pressure was applied to the smear and approximately 100 cm² of the surface was wiped. Smears were placed in labeled envelopes with the location and other pertinent information recorded.

Exposure Rate Measurements

Measurements of gamma exposure rates were performed using a pressurized ionization chamber (PIC). The instrument was adjusted to one meter above the surface and allowed to stabilize. The measurement was read directly in $\mu\text{R/h}$.

Radiological Analyses

Removable Activity

Smears were counted on a low background gas proportional system for gross alpha and gross beta activity.

UNCERTAINTIES AND DETECTION LIMITS

The uncertainties associated with the analytical data presented in the tables of this report represent the 95% confidence level for that data. These uncertainties were calculated based on both the gross sample count levels and the associated background count levels. Additional uncertainties, associated with sampling and measurement procedures, have not been propagated into the data presented in this report.

Detection limits, referred to as minimum detectable concentration (MDC), were based on 2.71 plus 4.65 times the standard deviation of the background count [$2.71 + (4.65\sqrt{\text{BKG}})$]. When the activity was determined to be less than the MDC of the measurement procedure, the result was reported as less than MDC. Because of variations in background levels, measurement efficiencies, and contributions from other radionuclide in samples, the detection limits differ from sample to sample and instrument to instrument.

CALIBRATION AND QUALITY ASSURANCE

Calibration of all field and laboratory instrumentation was based on standards/sources, traceable to NIST, when such standards/sources were available. In cases where they were not available, standards of an industry recognized organization were used. Calibration of pressurized ionization chambers was performed by the manufacturer.

Analytical and field survey activities were conducted in accordance with procedures from the following documents of the Environmental Survey and Site Assessment Program:

- Survey Procedures Manual, Revision 9 (April 1995)
- Laboratory Procedures Manual, Revision 9 (January 1995)
- Quality Assurance Manual, Revision 7 (January 1995)

The procedures contained in these manuals were developed to meet the requirements of DOE Order 5700.6C and ASME NQA-1 for Quality Assurance and contain measures to assess processes during their performance.

Quality control procedures include:

- Daily instrument background and check-source measurements to confirm that equipment operation is within acceptable statistical fluctuations.
- Participation in EPA and EML laboratory Quality Assurance Programs.
- Training and certification of all individuals performing procedures.
- Periodic internal and external audits.

APPENDIX C

**RESIDUAL RADIOACTIVE MATERIAL GUIDELINES SUMMARIZED
FROM DOE ORDER 5400.5**

APPENDIX C

RESIDUAL RADIOACTIVE MATERIAL GUIDELINES SUMMARIZED FROM DOE ORDER 5400.5

BASIC DOSE LIMITS

The basic limit for the annual radiation dose (excluding radon) received by an individual member of the general public is 100 mrem/yr. In implementing this limit, DOE applies as low as reasonable achievable principles to set site-specific guidelines.

STRUCTURE GUIDELINES

Indoor/Outdoor Structure Surface Contamination

Radionuclides ^a	Allowable Total Residual Surface Contamination (dpm/100 cm ²) ^b		
	Average ^{c,d}	Maximum ^{d,e}	Removable ^f
Transuranics, Ra-226, Ra-228, Th-230 Th-228, Pa-231, Ac-227, I-125, I-129 ^g	100	300	20
Th-Natural, Th-232, Sr-90, Ra-223, Ra-224, U-232, I-126, I-131, I-133	1,000	3,000	200
U-Natural, U-235, U-238, and associated decay products	5,000 α	15,000 α	1,000 α
Beta-gamma emitters (radionuclides with decay modes other than alpha emission or spontaneous fission) except Sr-90 and others noted above ^h	5,000 β - γ	15,000 β - γ	1,000 β - γ

External Gamma Radiation

The average level of gamma radiation inside a building or habitable structure on a site that has no radiological restriction on its use shall not exceed the background level by more than 20 μ R/h and will comply with the basic dose limits when an appropriate-use scenario is considered.

- a Where surface contamination by both alpha- and beta-gamma-emitting radionuclides exists, the limits established for alpha- and beta-gamma-emitting radionuclides should apply independently.
- b As used in this table, dpm (disintegrations per minute) means the rate of emission by radioactive material as determined by correcting the counts per minute measured by an appropriate detector for background, efficiency, and geometric factors associated with the instrumentation.
- c Measurements of average contamination should not be averaged over an area of more than 1 m². For objects of less surface area, the average should be derived for each such object.
- d The average and maximum dose rates associated with surface contamination resulting from beta-gamma emitters should not exceed 0.2 mrad/h and 1.0 mrad/h, respectively, at a depth of 1 cm.
- e The maximum contamination level applies to an area of not more than 100 cm².
- f The amount of removable radioactive material per 100 cm² of surface area should be determined by wiping an area of that size with dry filter or soft absorbent paper, applying moderate pressure, and measuring the amount of radioactive material on the wipe with an appropriate instrument of known efficiency. When removable contamination on objects of surface area less than 100 cm² is determined, the activity per unit area should be based on the actual area and the entire surface should be wiped. It is not necessary to use wiping techniques to measure removable contamination levels, if direct scan surveys indicate that total residual surface contamination levels are within the limits for removable contamination.
- g Guidelines for these radionuclides are not given in DOE Order 5400.5; however, these guidelines are considered applicable until guidance is provided.
- h This category of radionuclides includes mixed fission products, including the Sr-90 which is present in them. It does not apply to Sr-90, which has been separated from the other fission products, or mixtures where the Sr-90 has been enriched.

REFERENCES

"U.S. Department of Energy Guidelines for Residual Radioactive Material at Formerly Utilized Sites Remedial Action Program and Remote Surplus Facilities Management Program Sites," Revision 2, March 1987.

"DOE Order 5400.5, Radiation Protection of the Public and the Environment," January 1993.